



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Spec-Master® Three-Compartment Sinks, model _____ . Unit constructed of 14 gauge 300 series, 18-8 stainless steel throughout. Sink bowls covered with a full 5/8" radius, and shall have a 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 9 1/2" high backsplash with 1" upturn and tile edge. Legs to be 1 1/2" O.D., stainless steel, with stainless steel gussets, stainless steel crossbracing and adjustable stainless steel bullet feet.



3-compartment sink
(faucets not included)

Options / Accessories

- Lever drain
- Lever drain with overflow
- Twist handle drains
- Overflow hole
- Sink kits
- Faucets
- Polyboard sink covers
- Stainless steel sink covers
- Skirted front panel

Assembly:

- Entire assembly is fuse-welded and planished, providing a one-piece seamless sink unit.
- Welded areas are high-speed belt blended to match adjacent surfaces with continuity of satin finish.
- All outside corners of assembly are bullnosed to provide safe, clean edges.
- Water supply is 1/2" (13mm) NPS for hot and cold lines.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglehmc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Three-Compartment Sinks

MODELS:

- FN2048-3-* FN2472-3-*
- FN2054-3-* FN2860-3-*
- FN2060-3-*

* See table on back for complete model numbers.

Top:

- Drainboards, backsplash and rolled rims are 14 gauge 300 series stainless steel.
- Drainboards, when provided, are integrally welded.
- All rolled edges are highlighted for enhanced appearance.
- 9 1/2" high backsplash with 1" upturn and tile edge.
- 1 1/8" (29mm) faucet holes* punched on 8" (203mm) centers.

Base:

- Legs: 1 1/2" (41mm)-diameter stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: Adjustable, 1 1/4" (32mm)-diameter stainless steel; running left-to-right and front-to-back.
- Leg locations fall directly under sink bowls**, providing increased stability and maximum weight support.
- Leg gussets welded to a die-cut heavy-gauge stainless steel reinforcing corner plate.
- Legs are crossbraced on all sides for increased stability.

Sink Bowls:

- 14 gauge 300 series stainless steel.
- 14" (356mm) water level, 17" (432mm) flood level.
- Sink compartments are coved on a full 5/8" (41mm) radius and constructed using state-of-the-art seamless welding techniques.
- Basket-type waste drain fits sink bowls' 3 1/2" (89mm) opening and features 1 1/2" (38mm) outlet.

* Three-compartment sinks with 20" x 16" (508 x 406mm) bowls have one set of faucet holes. All others feature two sets of faucet holes.

** On sinks with drainboard(s) 30" or longer, legs are located underneath the outer end of drainboard(s).

Certifications / Approvals



AutoQuotes



EG20.34 Rev. 06/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites


Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2024 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Three-Compartment Sinks

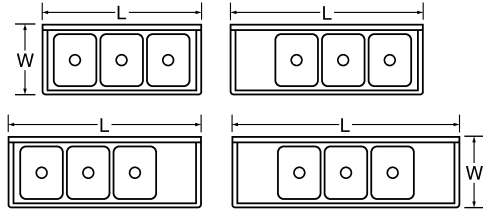

Drain location for rough-in

bowl width	bowl length	Dimension A	
in. mm	in. mm	in.	mm
20" 508	16" 406	14"	356
20" 508	18" 457	14"	356
20" 508	20" 508	14"	356
24" 610	24" 610	16"	406
28" 711	20" 508	18"	457

model #	BOWL DIMENSIONS				quantity	DRAINBOARD		OVERALL DIMENSIONS				weight	
	width		length			length		width		length		lbs.	kg
	in.	mm	in.	mm		in.	mm	in.	mm	in.	mm		
FN2048-3-14/3	20"	508	16"	406	0	-	-	27"	686	57"	1448	165	74.8
FN2048-3-18R or L-14/3	20"	508	16"	406	1	18"	457	27"	686	73½"	1867	176	79.8
FN2048-3-18-14/3	20"	508	16"	406	2	18"	457	27"	686	90"	2286	199	90.3
FN2048-3-24R or L-14/3	20"	508	16"	406	1	24"	610	27"	686	79½"	2019	190	86.2
FN2048-3-24-14/3	20"	508	16"	406	2	24"	610	27"	686	102"	2591	204	92.5
FN2048-3-30R or L-14/3	20"	508	16"	406	1	30"	762	27"	686	85½"	2172	200	90.7
FN2048-3-30-14/3	20"	508	16"	406	2	30"	762	27"	686	114"	2896	234	106.1
FN2048-3-36R or L-14/3	20"	508	16"	406	1	36"	914	27"	686	91½"	2324	210	95.3
FN2048-3-36-14/3	20"	508	16"	406	2	36"	914	27"	686	126"	3200	249	113.0
FN2054-3-14/3 *	20"	508	18"	457	0	-	-	27"	686	63"	1600	175	79.4
FN2054-3-18R or L-14/3 *	20"	508	18"	457	1	18"	457	27"	686	79½"	2019	186	84.4
FN2054-3-18-14/3 *	20"	508	18"	457	2	18"	457	27"	686	96"	2438	209	94.8
FN2054-3-24R or L-14/3 *	20"	508	18"	457	1	24"	610	27"	686	85½"	2172	210	95.3
FN2054-3-24-14/3 *	20"	508	18"	457	2	24"	610	27"	686	108"	2743	214	97.1
FN2054-3-30R or L-14/3 *	20"	508	18"	457	1	30"	762	27"	686	91½"	2324	215	97.5
FN2054-3-30-14/3 *	20"	508	18"	457	2	30"	762	27"	686	120"	3048	244	110.7
FN2054-3-36R or L-14/3 *	20"	508	18"	457	1	36"	914	27"	686	97½"	2477	220	99.8
FN2054-3-36-14/3 *	20"	508	18"	457	2	36"	914	27"	686	132"	3358	259	117.5
FN2060-3-14/3 *	20"	508	20"	508	0	-	-	27"	686	69"	1753	185	83.9
FN2060-3-18R or L-14/3 *	20"	508	20"	508	1	18"	610	27"	686	85½"	2172	206	93.4
FN2060-3-18-14/3 *	20"	508	20"	508	2	18"	457	27"	686	102"	2591	219	99.3
FN2060-3-24R or L-14/3 *	20"	508	20"	508	1	24"	610	27"	686	91½"	2324	221	100.3
FN2060-3-24-14/3 *	20"	508	20"	508	2	24"	610	27"	686	114"	2896	224	101.6
FN2060-3-30R or L-14/3 *	20"	508	20"	508	1	30"	762	27"	686	97½"	2477	236	107.1
FN2060-3-30-14/3 *	20"	508	20"	508	2	30"	762	27"	686	126"	3200	254	115.2
FN2060-3-36R or L-14/3 *	20"	508	20"	508	1	36"	914	27"	686	103½"	2629	265	120.2
FN2060-3-36-14/3 *	20"	508	20"	508	2	36"	914	27"	686	138"	3505	275	124.7
FN2472-3-14/3 *	24"	610	24"	610	0	-	-	31"	787	81"	2057	200	90.7
FN2472-3-18R or L-14/3 *	24"	610	24"	610	1	18"	457	31"	787	97½"	2477	226	102.5
FN2472-3-18-14/3 *	24"	610	24"	610	2	18"	457	31"	787	114"	2896	249	113.0
FN2472-3-24R or L-14/3 *	24"	610	24"	610	1	24"	610	31"	787	103½"	2629	240	108.9
FN2472-3-24-14/3 *	24"	610	24"	610	2	24"	610	31"	787	126"	3200	260	117.9
FN2472-3-30R or L-14/3 *	24"	610	24"	610	1	30"	762	31"	787	109½"	2769	270	122.5
FN2472-3-30-14/3 *	24"	610	24"	610	2	30"	762	31"	787	138"	3505	304	137.9
FN2472-3-36R or L-14/3 *	24"	610	24"	610	1	36"	914	31"	787	115½"	2934	310	140.6
FN2472-3-36-14/3 *	24"	610	24"	610	2	36"	914	31"	787	150"	3810	319	144.7
FN2860-3-14/3 *	28"	711	20"	508	0	-	-	35"	889	69"	1753	252	114.3
FN2860-3-18R or L-14/3 *	28"	711	20"	508	1	18"	457	35"	889	85½"	2172	299	135.6
FN2860-3-18-14/3 *	28"	711	20"	508	2	18"	457	35"	889	102"	2591	360	163.3
FN2860-3-24R or L-14/3 *	28"	711	20"	508	1	24"	610	35"	889	91½"	2324	310	140.6
FN2860-3-24-14/3 *	28"	711	20"	508	2	24"	610	35"	889	114"	2896	356	161.5
FN2860-3-30R or L-14/3 *	28"	711	20"	508	1	30"	762	35"	889	97½"	2477	315	142.9
FN2860-3-30-14/3 *	28"	711	20"	508	2	30"	762	35"	889	126"	3200	375	170.1
FN2860-3-36R or L-14/3 *	28"	711	20"	508	1	36"	914	35"	889	103½"	2629	326	147.9
FN2860-3-36-14/3 *	28"	711	20"	508	2	36"	914	35"	889	138"	3505	434	196.9

* Features two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065
 www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.
 ©2024 by Eagle Group

Rev. 06/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.