

Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Quad-Adjust® Wire Shelf, model ______. EAGLEbrite® zinc, chrome, Valu-Master® Grey Epoxy, Valu-Gard® Green Epoxy, EAGLEgard® Green Epoxy with MICROGARD®, or stainless steel finish. Custom colors available. Patented QuadTruss® design. Specially designed for addition or removal of a shelf without disassembling entire shelf unit. Shelf features corners that interlock with post-mounted collars. Numerically grooved posts are 1" diameter.



Ontions	/ L	/ccess	nries

Casters	Rods & tab
---------	------------

☐ Ledges ☐ Aluminum split sleeves

□ Dividers □ Shelf markers

☐ Foot plates ☐ "S" hooks

EAGLE GROUP

100 Industrial Boulevard Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • 800-441-8440

Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division.** Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	
J.I.J. 11U	

Quad-Adjust® Wire Shelving

MODELS:

_ QA14*	□ QA24*	□ <i>QAR21*</i>	□ <i>P7-*</i>	□ <i>P33-*</i>	□ <i>P74-</i> 3
_ QA18*	□ <i>QAR14*</i>	□ <i>QAR24*</i>	□ <i>P14-*</i>	□ <i>P54-*</i>	□ <i>P86-</i>
_ QA21*	□ <i>QAR18*</i>		□ P18-*	□ <i>P63-*</i>	

* See charts for complete model numbers.

- Patented Quad-Truss® shelves (patent #5,390,803) for increased strength and durability.
- Shelves feature special interlocking corners that fit in slots of collars mounted to split sleeves, allowing addition or removal of a shelf without the need to disassemble the entire shelf unit. Patent #7.992.731.
- Tapered split sleeves create a positive lock that becomes stronger as the load increases.
- Posts are numbered in increments of 1" (25mm) to ensure fast and level assembly.
- Leveling feet are provided to help compensate for uneven floor surfaces.
- Shelf utilizes a pincer-type design with the mat wire sandwiched between the two top truss wires, adding significant strength and distributing the entire load without stress and strain on the welds.
- Finishes available are EAGLEbrite® zinc, chrome, Valu-Master® grey epoxy, Valu-Gard® green epoxy, EAGLEgard® green epoxy with MICROGARD®, and stainless steel. Custom colors available.
- To create a mobile shelf unit, top and bottom shelves must be standard shelves (spec sheet #EG01.00).

Weight capacities:

- Shelves up to 48" (1219mm) in length can support an evenly distributed static load of 800 lbs. (362.9 kg).
- Shelves of 60" and 72" (1524 and 1829mm) length can support an evenly distributed static load of 600 lbs. (272.2 kg).
- IMPORTANT: Stationary units should not exceed 2400 lbs. (1088.6 kg) per set of four posts.
- IMPORTANT: Maximum load for mobile units is to be one the following, whichever is less:
 - 3 times the weight rating for one caster, or
 - 1000 lbs. (453.6 kg) per set of four posts.

Certifications / Approvals









EG01.14A Rev. 04/22



Item No.:	
Project No.:	
S.I.S. No.:	

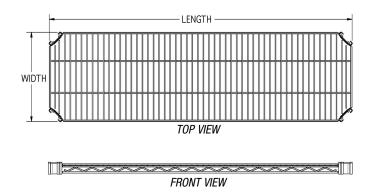

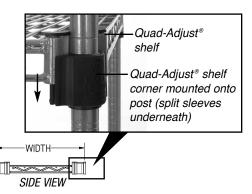

To specify finish (available for all components listed), place the corresponding suffix after the model number.

suffix "Z" = EAGLEbrite® suffix "C" = Chrome

suffix "V" = Valu-Master® Gray Epoxy

suffix "E" = EAGLEgard® Green Epoxy

suffix "**VG**" = Valu-Gard® Green Epoxy suffix "**S**" = stainless steel

Shelves

	width x length		weight	
model #	in.	mm	lb.	kg
QA1424	14" x 24"	356 x 610	6	2.7
QA1430	14" x 30"	356 x 762	7	3.2
QA1436	14" x 36"	356 x 914	8	3.6
QA1442	14" x 42"	356 x 1067	9	4.1
QA1448	14" x 48"	356 x 1219	10	4.6
QA1454	14" x 54"	356 x 1372	12	5.5
QA1460	14" x 60"	356 x 1524	14	6.4
QA1472	14" x 72"	356 x 1829	17	7.7
QA1824	18" x 24"	457 x 610	7	3.2
QA1830	18" x 30"	457 x 762	8	3.6
QA1836	18" x 36"	457 x 914	9	4.1
QA1842	18" x 42"	457 x 1067	11	5.0
QA1848	18" x 48"	457 x 1219	12	5.5
QA1854	18" x 54"	457 x 1372	15	6.8
QA1860	18" x 60"	457 x 1524	17	7.7
QA1872	18" x 72"	457 x 1829	20	9.1
QA2124	21" x 24"	533 x 610	8	3.6
QA2130	21" x 30"	533 x 762	9	4.1
QA2136	21" x 36"	533 x 914	11	5.0
QA2142	21" x 42"	533 x 1067	12	5.5
QA2148	21" x 48"	533 x 1219	14	6.4
QA2154	21" x 54"	533 x 1372	16	7.3
QA2160	21" x 60"	533 x 1524	18	8.2
QA2172	21" x 72"	533 x 1829	24	10.9
QA2424	24" x 24"	610 x 610	9	4.1
QA2430	24" x 30"	610 x 762	11	5.0
QA2436	24" x 36"	610 x 914	13	5.9
QA2442	24" x 42"	610 x 1067	15	6.8
QA2448	24" x 48"	610 x 1219	16	7.3
QA2454	24" x 54"	610 x 1372	19	8.6
QA2460	24" x 60"	610 x 1524	21	9.5
QA2472	24" x 72"	610 x 1829	26	11.8

Reverse Mat Shelves

	width	we	weight	
model #	in.	mm	lb.	kg
QAR1424	14" x 24"	356 x 610	6	2.7
QAR1436	14" x 36"	356 x 914	8	3.6
QAR1448	14" x 48"	356 x 1219	10	4.6
QAR1824	18" x 24"	457 x 610	7	3.2
QAR1836	18" x 36"	457 x 914	9	4.1
QAR1848	18" x 48"	457 x 1219	12	5.5
QAR2124	21" x 24"	533 x 610	8	3.6
QAR2136	21" x 36"	533 x 914	11	5.0
QAR2148	21" x 48"	533 x 1219	14	6.4
QAR2424	24" x 24"	610 x 610	9	4.1
QAR2436	24" x 36"	610 x 914	13	5.9
QAR2448	24" x 48"	610 x 1219	16	7.3

Posts

Numerically grooved in 1" (25mm) increments. Includes post cap and leveling bolt.

	height		weight	
model #	in. m	m	lb.	kg
P7-	7″ 1	78	1.0	0.5
P14-	14″ 3!	56	1.0	0.5
P18-	18″ 4	57	1.5	0.7
P33-	33″ 83	38	2.0	0.9
P54-	54″ 137	72	3.0	1.4
P63-	63″ 160	00	3.5	1.6
P74-	74″ 188	30	4.0	1.8
P86-	86″ 218	34	5.0	23

Notes:

- EAGLEbrite® posts are clear epoxy coated for use in dry or wet environments.
- MICROGARD® antimicrobial protection standard on all EAGLEgard® posts.
- For mobile application, add prefix "C" to model number. Example: CP14-E. See Spec Sheet EG01.05 for information about casters available

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglemhc.com

©2022 by Eagle Group

Rev. 04/22

Printed in U.S.A.

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com