



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Overall cart dimension 31¼" width x 21½" length for end-load models. Overall cart dimension of 21½" width x 31¼" length for side-load models. Full height model, in front- or end-load models, allows for 30 trays. Half height model, in front- or end-load models, allows for 20 trays. 5"-diameter 50 shore A polyurethane wheels. Optional conductive split sleeves and grounding cables provide ESD characteristic. Front and back tray locks.



ETCE20-Z
*half size, end load model
with optional drag chain
and ESD trays*

Options / Accessories

- ESD Tray
- ESD Grounding Cable
- Anti-Static Drag Chain

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB®** Division.

Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Electronic Vibration Dampening Tray Carts

MODELS:

- ETCE20-Z
- ETCE30-Z
- ETCS20-Z
- ETCS30-Z

Design and Construction Features


- Provides maximum benefits in vibration transfer, ESD safety, and cost.
- Aluminum split sleeves.
- Wire shelves, posts, push handles, and locks are chrome-plated.
- Vibration transfer is dramatically reduced via polyurethane 50 shore A casters—5" (127mm)-diameter, swivel, two with brake.
- Aluminum split sleeves and an optional grounding device (ESD grounding cable or anti-static drag chain) make carts ESD-safe.
- Front and rear locks to ensure product safety.
- End- and side-load units available.
- Full height and half height units available.
- Half height models feature push handles.



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Electronic Vibration Dampening Tray Carts

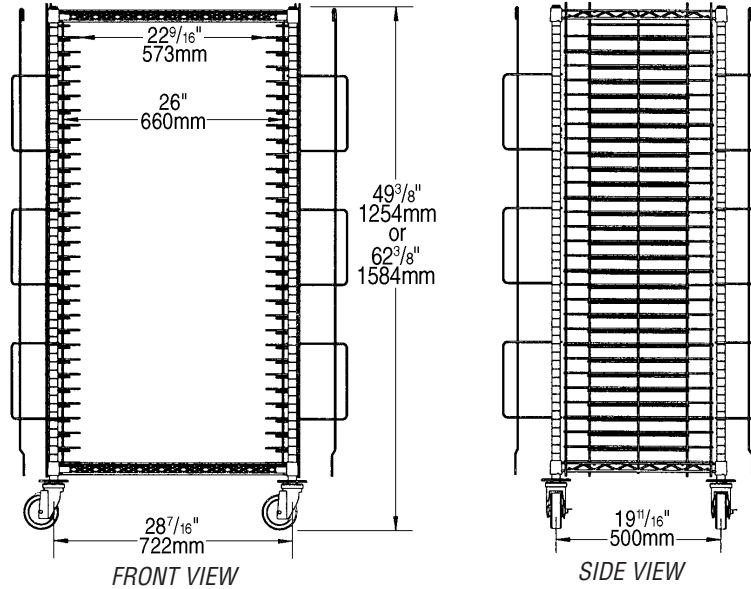


model #	description	overall dimensions						weight		sliding space		full size pan capacity
		width in.	width mm	length in.	length mm	height in.	height mm	lbs.	kg	in.	mm	
ETCE20-Z	end load, half height	31 3/4"	807	21 5/8"	543	49 3/8"	1254	80	36.3	1 3/4"	45	20
ETCE30-Z	end load, full height	31 3/4"	807	21 5/8"	543	62 3/8"	1584	97	44.0	1 3/4"	45	30
ETCS20-Z	side load, half height	21 5/8"	543	31 3/4"	807	49 3/8"	1254	80	36.3	1 3/4"	45	20
ETCS30-Z	side load, full height	21 5/8"	543	31 3/4"	807	62 3/8"	1584	97	44.0	1 3/4"	45	30

Options for Electronic Tray Carts

ESD Grounding Cable

Provides greater dependability on mobile units. Replaces conductive casters when used with conductive split sleeves. Easily installed.



model #
GC-16

Anti-Static Drag Chain

16" (406mm) long. Used for conductive applications.



model #
DC16-S

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
©2012 by Eagle Group

Rev. 01/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.