


HSA-10-FDPS-T

ASSEMBLY INSTRUCTIONS

CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE. **SAVE YOUR BOX AND ALL PACKING MATERIALS.** YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

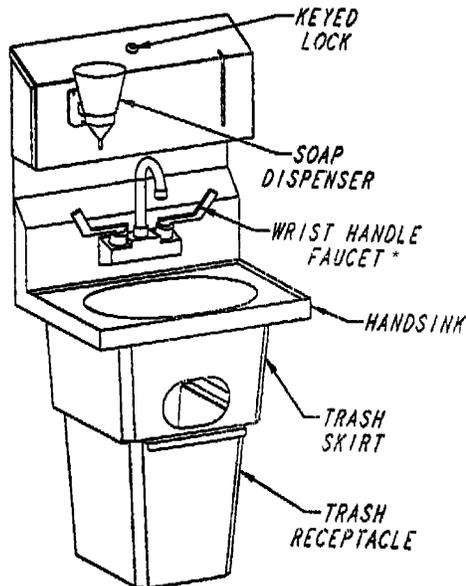

Parts List

| qty | part # | description |
|------------------------------------|-------------|------------------------|
| 1 | DP-10 | soap & towel dispenser |
| 1 | HSA-10-FDPS | HSA Series handsink** |
| 1 | 325278 | skirt |
| 1 | 325271 | can |
| * wrist handles shown are optional | | |

1) Towel Dispenser

Mark the wall at 55 1/4" above finished floor (this will be the top of the Towel/Soap dispenser). Carefully open the Towel Dispenser to gain access to the keyway holes inside. Align the top of the unit with the 55 1/4" mark. Install appropriate fasteners (not included) through keyway holes. Close the lid/hinge assembly. Complete mounting the towel dispenser using the four holes along the bottom with the appropriate fasteners (not included). See figure 1.

2) Trash Skirt

Remove the 1/4-20 nylon locking hex nuts from the underside of the handsink. Temporarily place the handsink over the flange on the bottom of the towel dispenser (this flange eliminates the need to use the "z" angle bracket supplied with all handsinks). With the assistance from someone else, hold the skirt in what would be its mounted position and raise the trash skirt up to the underside of the sink. Mark a horizontal and vertical reference (bottom and side of trash skirt) on the wall. At this point, set aside the handsink and mount the trash skirt to the wall using the appropriate fasteners through the four keyway holes. See figure 2.

3) Hand Sink

Install the faucet to the handsink, plumb downward accordingly. Replace the handsink over the flange on the towel dispenser and over the trash skirt. From the bottom side of the handsink, install the 1/4-20 nylon locking hex nuts to the studs located on the handsink, securing the trash skirt to the handsink. Plumb the basket/strainer drain accordingly.

4) Trash Receptacle

Carefully install the trash receptacle to the trash skirt by aligning the flanges on the trash receptacle with the friction slides on the trash skirt.

5) Soap Dispenser

Once the entire unit is assembled, install the hand pump soap dispenser to the towel dispenser using the three machine screws and hex nuts provided.

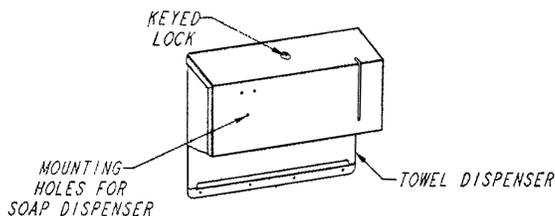


figure 1

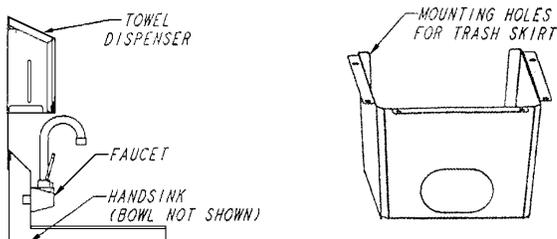


figure 2

