

Profit from the Eagle Advantage®

# **Specification Sheet**

### **Short Form Specifications**

Eagle Four-Compartment Sink, model 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Topincluding backsplash, and drainboards (when required)-is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1%" O.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.





## **Options / Accessories**

- Stainless steel legs
- ☐ Stainless steel bullet feet
- □ Lever drains
- Twist handle drains
- Twist drain brackets
- □ Faucets
- ☐ Sink covers
- Waste outlets
- ☐ Sink kits
- Overflow hole

### **EAGLE GROUP**

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglegrpnews.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

# **414 Series Coved Corner Four-Compartment Sinks**

#### MODELS:

<b>□</b> 414-16-4	□ A1A 10 A	D 414 24 4
<b>□</b> 414-10-4	<b>□</b> 414-18-4	<b>414-24-4</b>
<b>□</b> 414-16-4-18	<b>414-18-4-18</b>	<b>414-24-4-18</b>
□ 414-16-4-18L	☐ 414-18-4-18L	☐ 414-24-4-18L
□ 414-16-4-18R	☐ 414-18-4-18R	☐ 414-24-4-18R
<b>□</b> 414-16-4-24	<b>□</b> 414-18-4-24	<b>414-24-4-24</b>
☐ 414-16-4-24L	☐ 414-18-4-24L	☐ 414-24-4-24L
☐ 414-16-4-24R	□ 414-18-4-24R	□ 414-24-4-24R

#### **Materials**

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1%" (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

### **Design and Construction Features**

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

### Mechanical:

- Water supply is ½" (13mm) IPS for hot and cold lines.
- Faucet holes are 11/8" (29mm) punched on 8" (203mm) centers; two sets of faucet holes are punched.
- Basket-type waste drain included fits sink bowls'  $3\frac{1}{2}$ " (89mm) opening and features  $1\frac{1}{2}$ " (38mm) outlet.

# **Certifications / Approvals**








EG20.26 Rev. 12/22





Item No.:
Project No.:
S.I.S. No.:


# **414 Series Coved Corner Four-Compartment Sinks**







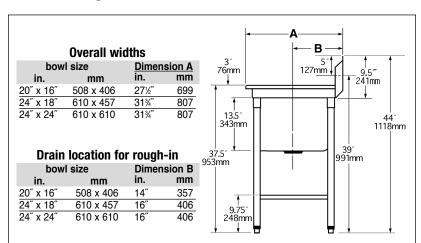









	BOWL DIMENSIONS width length				DRAINBOARD lenath			OVERALL DIMENSIONS width length				weight	
model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
414-16-4	20″	508	16″	406	0			27½″	699	76½"	1943	180	81.7
414-16-4-18R or L	20″	508	16″	406	1	18″	457	27½"	699	921/8"	2340	195	88.5
414-16-4-18	20″	508	16″	406	2	18″	457	27½″	699	107¾"	2737	231	104.8
414-16-4-24R or L	20″	508	16″	406	1	24"	610	27½″	699	98¼"	2492	235	106.6
414-16-4-24	20″	508	16″	406	2	24"	610	27½″	699	119¾"	3042	238	108.0
414-18-4	24"	610	18″	457	0			31¾″	807	85½"	2172	218	98.9
414-18-4-18R or L	24"	610	18″	457	1	18″	457	31¾″	807	100¾″	2559	225	102.1
414-18-4-18	24"	610	18″	457	2	18″	457	31¾″	807	116″	2946	247	112.0
414-18-4-24R or L	24″	610	18″	457	1	24"	610	31¾″	807	106¾"	2711	254	115.2
414-18-4-24	24"	610	18″	457	2	24"	610	31¾″	807	128″	3251	262	118.8
414-24-4	24"	610	24"	610	0		-	31¾″	807	109½"	2783	231	104.8
414-24-4-18R or L	24"	610	24"	610	1	18″	457	31¾″	807	124¾"	3169	248	112.5
414-24-4-18	24″	610	24"	610	2	18″	457	31¾″	807	140"	3556	263	119.3
414-24-4-24R or L	24"	610	24"	610	1	24"	610	31¾″	807	130¾″	3321	278	126.1
414-24-4-24	24″	610	24″	610	2	24″	610	31¾″	807	152″	3861	293	132.9

**EAGLE GROUP** 

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 12/22