




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Director's Choice® Hot/Cold Unit, model _____.
Type 304 stainless steel construction. 16 gauge stainless steel 2'-tall top. Dual temperature hot or cold operation. Pre-wired with hot/cold selector switch, required thermostatic controls and pilot light. Welded 1½" square tubular stainless steel base. 5" poly tread swivel casters—two with brake. Predrilled to accommodate accessories.

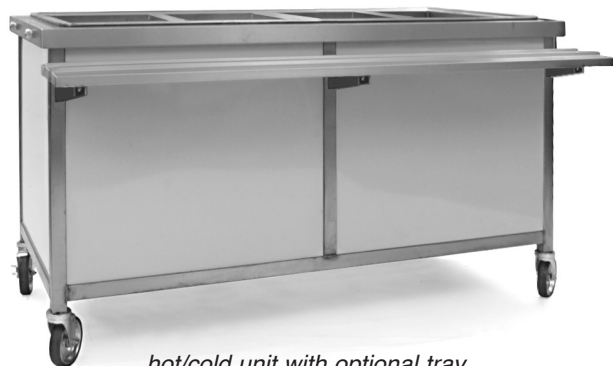

hot/cold unit with optional tray slide and end panels

Options / Accessories

- | | |
|--|---|
| <input type="checkbox"/> Laminated end panels | <input type="checkbox"/> Sneeze guards - single tier |
| <input type="checkbox"/> Stainless steel end panels | <input type="checkbox"/> Sneeze guards - double tier |
| <input type="checkbox"/> Stainless steel front panel | <input type="checkbox"/> Display lights for overshell |
| <input type="checkbox"/> Stainless steel tray slide* | <input type="checkbox"/> Removable stainless undershell |
| <input type="checkbox"/> Work shelf** | <input type="checkbox"/> Specify laminate _____ |
| <input type="checkbox"/> Rear doors and panels*** | <input type="checkbox"/> Custom options |

* Available in solid ribbed, square tubular or round tubular. For front, rear, or ends.

** Available in hardwood, stainless steel, poly, or Richlite®. For front, rear, or ends.

*** Available in hinged, solid, or louvered

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Director's Choice® Hot/Cold Units

MODELS:

- | | |
|--------------------------------------|--------------------------------------|
| <input type="checkbox"/> DCS2-HCFU-A | <input type="checkbox"/> DCS5-HCFU-B |
| <input type="checkbox"/> DCS3-HCFU-A | <input type="checkbox"/> DCS5-HCFU-C |
| <input type="checkbox"/> DCS4-HCFU-B | <input type="checkbox"/> DCS6-HCFU-B |
| <input type="checkbox"/> DCS4-HCFU-C | <input type="checkbox"/> DCS6-HCFU-C |

Design and Construction Features

- Dual temperature hot or cold operation.
- Fiberglass insulation on all sides.
- Stainless steel inner liner with coved corners and 3/4" (20mm) I.P.S. drain.
- Hot Mode: Immersion-type heating element (water required), with stainless steel sheath cover.
- Cold Mode: Self-contained condensing unit with sealed compressor. Fully charged with CFC-free refrigerant.
- Thermostatic control for hot and cold service.
- Pre-wired with hot/cold selector switch, required thermostatic controls and pilot light. Provided with 6-foot long cord with twist-lock plug.
- Type 304 stainless steel construction.
- 16 gauge type 304 stainless steel top is 30" (762mm) front-to-back and 2" (51mm) tall.
- 34" (864mm) standard working height complies with ADA guidelines for accessibility standards.
- Welded 1½" (38mm) square tubular type 304 stainless steel base construction.
- Open base on three sides – 7½" (183mm) tall type 304 stainless steel apron on operator's side.
- 5" (127mm) poly tread swivel casters (two with brake).
- Standard holly berry red front laminate panel (Wilsonart® D307-60) on heavy gauge galvanized subpanel.

Certifications / Approvals



AutoQuotes



EG33.23 Rev. 06/24




Spec sheets available for viewing, printing or downloading from our online literature library at our websites



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Director's Choice® Hot/Cold Units

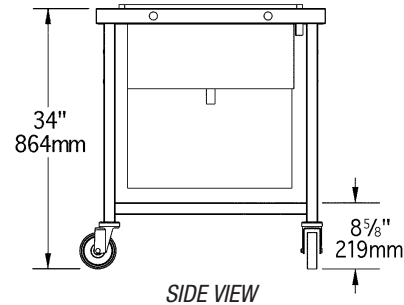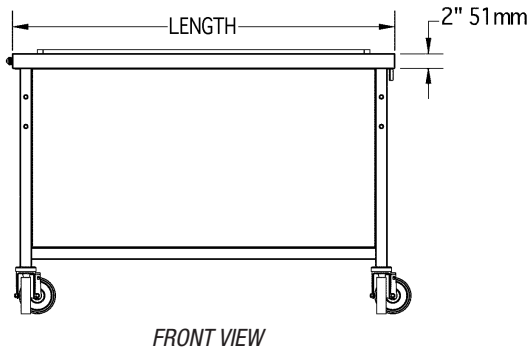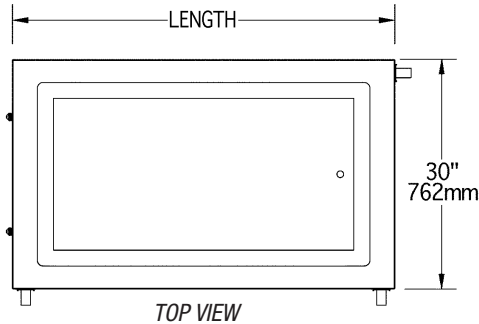

| # of top openings | model # | electrical data | | NEMA plug | length | | weight | |
|-------------------|--------------------|-------------------|-----------------|-----------|--------|------|--------|-------|
| | | Hot Mode | Cold Mode | | in. | mm | lbs. | kg |
| 2 | DCS2-HCFU-A | 16.7A 120V 2,000W | 2.4A 120V 1/5HP | L5-30P | 36" | 914 | 190 | 86.2 |
| 3 | DCS3-HCFU-A | 16.7A 120V 2,000W | 2.4A 120V 1/5HP | L5-30P | 50" | 1270 | 220 | 99.8 |
| 4 | DCS4-HCFU-B | 14.4A 208V 3,000W | 7.5A 120V 1/4HP | L14-30P | 64" | 1626 | 250 | 113.4 |
| 4 | DCS4-HCFU-C | 12.5A 240V 3,000W | 7.5A 120V 1/4HP | L14-30P | 64" | 1626 | 250 | 113.4 |
| 5 | DCS5-HCFU-B | 19.3A 208V 4,000W | 9.8A 120V 1/3HP | L14-30P | 78" | 1981 | 270 | 122.5 |
| 5 | DCS5-HCFU-C | 16.7A 240V 4,000W | 9.8A 120V 1/3HP | L14-30P | 78" | 1981 | 270 | 122.5 |
| 6 | DCS6-HCFU-B | 19.3A 208V 4,000W | 9.8A 120V 1/3HP | L14-30P | 96" | 2438 | 340 | 154.2 |
| 6 | DCS6-HCFU-C | 16.7A 240V 4,000W | 9.8A 120V 1/3HP | L14-30P | 96" | 2438 | 340 | 154.2 |

Optional laminate end panels available. To order, add suffix "-LEP" to model number. Example: DSC3-HCFU-A-LEP

Optional stainless steel front panel in lieu of laminate front panel available. To order, add suffix "-S" to model number. Example: DCS4-HCFU-B-S

Optional stainless steel end panels available. To order, add suffix "-SEP" to model number. Example: DSC4-HCFU-C-S-SEP

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.
 ©2024 by Eagle Group

Rev. 06/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.