



The EAGLE Advantage for

Panco[®] Transport Cabinets





Compare other heated cabinets to EAGLE's.




EAGLE's Full Size Panco® Transport System Holding/Proofing

Information in **color** indicates EAGLE advantages — Quality, Value, Reliability.



Patented Temp-Gard® airflow design maintains tight temperature control.

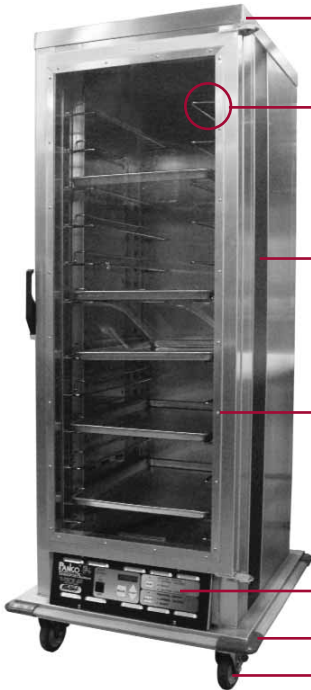


- Aluminum Construction** – Extruded aluminum frame is welded for greater stability.
- Slides** – Removable slides in standard and universal styles feature 5/8" diameter chrome plated mild steel wire construction. Standard 2 1/4" spacing (3" on optional extended width units). Custom spacing available.
- Color Strip** – Allows quick identification of type of unit.
 - red = insulated heated cabinets
 - white = insulated proofing cabinets
 - black = insulated heated/proofing cabinets
- Door** – Available in solid or Tuffak® clear door. Tuffak® offers higher heat resistance and better scratch resistance than Lexan® or other polycarbonates.
- Control Panel** – Bottom mounted with digital LCD readout of temperature and humidity settings, and overheat alarm.
- Bumper** – Full perimeter bumper is standard.
- Casters** – Heavy duty 5"-diameter polymer swivel casters, two with brake. The non-marking polymer material is harder than neoprene, allowing easier mobility.

Digital control panel for temperature and humidity.

Metro Holding/Proofing...

Analog control panel for temperature and humidity.

Blower-forced air circulation.

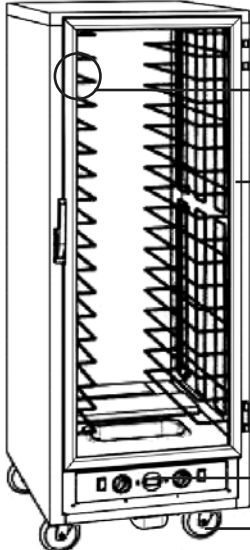

- Aluminum construction.
- Slides are either nickel-chrome plated wire racks, fixed or adjustable, or fixed aluminum channel.
- Doors* available with solid dutch doors and/or polycarbonate, which has a lower heat deflection and is more susceptible to scratching.
- Bottom mount control panel is analog with a digital thermometer and LED readout.
- Casters are 5" neoprene swivel casters, two with brake.
- Bumpers are optional.


**Only EAGLE offers Pass-Through Doors as an option. Available in solid or Tuffak®, single or dutch.*

Compare other heated cabinets to EAGLE's.

Bevles Holding/Proofing...

Analog control panel for temperature and humidity.

Blower-forced air circulation.

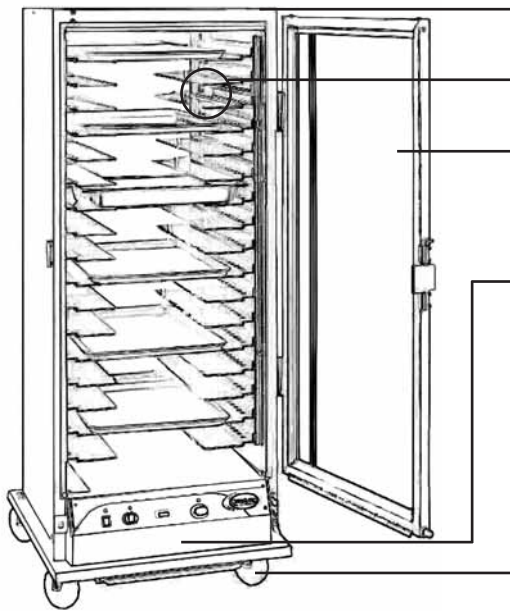


- Aluminum construction.
- Aluminum slides are adjustable.
- Doors* available with dutch doors, solid and Lexan® which has a lower heat deflection and is more susceptible to scratching.
- Bottom mount control panel is analog with a dial thermometer.
- Casters are 5" neoprene swivel casters, two with brake.
- Bumpers are optional.

Cres Cor Holding/Proofing...

Analog control panel for temperature and humidity.

Blower-forced air circulation.

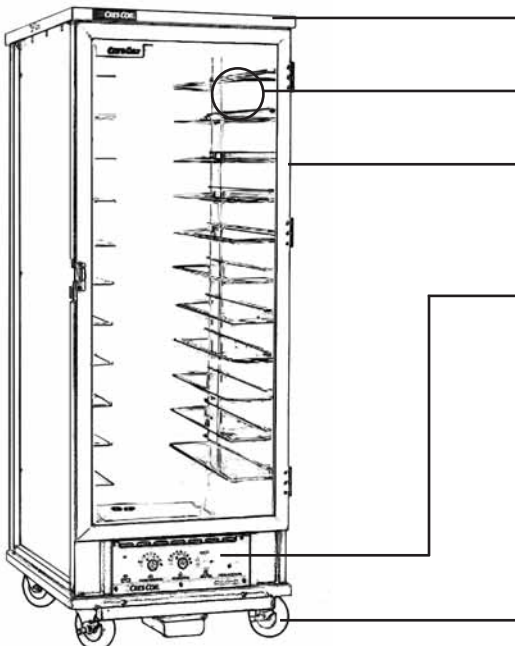

- Aluminum construction.
- Removable wire slides.
- Doors* available solid and Lexan® which has a lower heat deflection and is more susceptible to scratching.
- Bottom mount control panel is analog with a digital thermometer.
- Casters are 5" swivel casters, two with brake.
- Bumpers are optional.

**Only EAGLE offers Pass-Through Doors as an option. Available in solid or Tuffak®, single or dutch.*

Compare side-by-side

Holding/Proofing Cabinets...

	EAGLE Panco® Transport Holding/Proofing	Metro Holding/Proofing	Cres Cor Holding/Proofing	Bevles Holding/Proofing
Body	Aluminum frame extrusion	Aluminum	Aluminum	Aluminum
Slides	Wire slides or wire universal slides, —custom spacing available. Slides are removable.	Slides are either nickel-chrome wire racks (fixed or adjustable) or fixed aluminum channel	Wire slides are adjustable	Aluminum channel slides are adjustable
Air flow	Patented Temp-Gard® unique airflow design	Blower forced	Blower forced	Blower forced
Door	Solid or clear Tuffak®; pass-through and/or dutch	Solid, dutch, and/or polycarbonate	Solid, dutch, and/or with Lexan®	Solid, dutch, and/or with Lexan®
Control Panel	Digital bottom mount control panel	Analog bottom mount control panel	Analog bottom mount control panel	Analog bottom mount control panel
Bumpers	Standard feature	Optional	Optional	Optional

Panco® Transport Holding/Proofing Cabinet Features


- Full-size, half-size, and **NEW** undercounter models available.
- Bottom mounted control panel and heating system removes easily for cleaning or servicing.
- 2000-Watt heating capacity with internal air temperature up to 200°F. 1500-Watt is optional on 120V only.
- High-temperature protection device with caution alarm and auto reset.
- Full 270 degree open door swing via 3/8"-thick heavy duty aluminum hinges with stainless steel pin.
- Positive closing magnetic door latch.
- Available in both insulated and non-insulated.
- Insulated units feature identity color stripe on both sides.
- 8' cord and plug provided.
- Available in 120V, 208V, and 240V models.
- Full perimeter bumper standard on all models.
- Heavy duty polymer swivel casters, two with brake.
- Optional Pass-Through Doors make loading and unloading easy. Also allows access to hard-to-reach areas while cleaning.
- Optional Dutch Doors minimize heat loss.



half-size unit with extended width



full-size unit with pass-through dutch doors

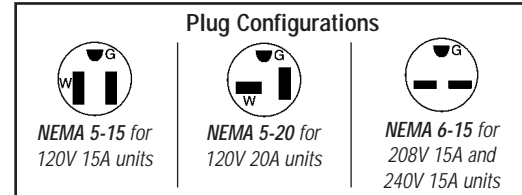

The Eagle Advantage can be summed up in two concise points: Price/value leadership and value-added service. EAGLE is committed to providing you the highest quality products while maintaining the cost competitiveness necessary in today's market.



Profit from the EAGLE Advantage®

Corporate Headquarters • 100 Industrial Boulevard
Clayton, DE 19938-8903
• Phone: (302) 653-3000

Foodservice/ SpecFAB® Divisions • Phone: (800) 441-8440
• Fax: (302) 653-2065

Material Handling Division • Phone: (800) 637-5100
• Fax: (302) 653-2065

www.eaglegrp.com

