

Specification Sheet

Short Form Specifications

BlendPort® Equipment Stand, model _____.
 18 gauge type 430 stainless steel top with 1½" upturn on rear and ends. Constructed with gussets recessed into galvanized hat channels to reduce lateral movement. Heavy gauge galvanized or stainless steel adjustable undershelf, 1½"-diameter galvanized or stainless steel tubular legs with plastic adjustable bullet feet.



Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Equipment Stands with Adjustable Legs and Undershelf

MODELS:

- BPT-2424EG
- BPT-2436EG
- BPT-2448EG
- BPT-2460EG
- BPT-2472EG
- BPT-3015*
- BPT-3018*
- BPT-3024*
- BPT-3030EG
- BPT-3036*
- BPT-3048*
- BPT-3060*
- BPT-3072*

* See charts on back page for complete model numbers.

Tabletop

- Highly-polished 18 gauge type 430 stainless steel top with 1½" (38mm) upturns at rear and both ends.
- Gussets are recessed into hat channels, reducing lateral movement.

Adjustable Undershelf


- Heavy gauge galvanized or stainless steel, with gussets welded to each corner.

Legs

- Galvanized or stainless steel.
- 1½" (41mm)-diameter.
- Adjustable plastic feet.

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Equipment Stands with Adjustable Legs and Undershelf

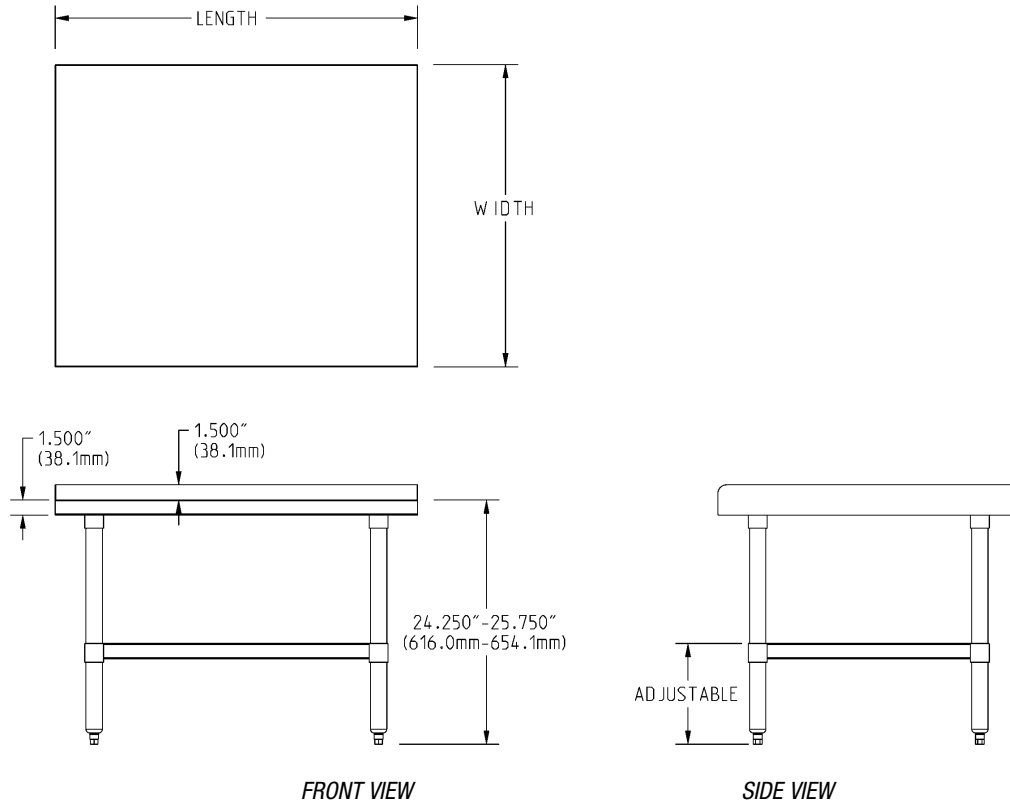

Stands with Galvanized Legs and Undershelf		Stands with Stainless Steel Legs and Undershelf		# of legs	width		length		weight	
model #	model #	in.	mm		in.	mm	lbs.	kg		
BPT-2424EG	—	4	24"	610	24"	610	39	17.7		
BPT-2436EG	—	4	24"	610	36"	914	48	21.8		
BPT-2448EG	—	4	24"	610	48"	1219	56	25.4		
BPT-2460EG	—	4	24"	610	60"	1524	64	29.0		
BPT-2472EG	—	6	24"	610	72"	1829	73	33.1		
BPT-3015EG	BPT-3015ES	4	30"	762	15"	381	29	13.2		
BPT-3018EG	BPT-3018ES	4	30"	762	18"	457	32	14.5		
BPT-3024EG	BPT-3024ES	4	30"	762	24"	610	39	17.7		
BPT-3030EG	—	4	30"	762	30"	762	50	22.7		
BPT-3036EG	BPT-3036ES	4	30"	762	36"	914	52	23.6		
BPT-3048EG	BPT-3048ES	4	30"	762	48"	1219	61	27.7		
BPT-3060EG	BPT-3060ES	4	30"	762	60"	1524	77	34.9		
BPT-3072EG	BPT-3072ES	6	30"	762	72"	1829	86	39.0		