

SINKS AVAILABLE

412, 414, and 314 Series

One- To Four-Compartment

Miscellaneous

314 Series Corner
Convenience Store
Lavatory
Mop Sinks
Mop Sink Storage Cabinets
Stainless Steel Fabricated

Counter Drop-In

With Self Rim Design

Hand Sinks

Electronic - Battery Power
Electronic Eye Hand Sinks
- AC Power
Hand Wash Sinks
Physically Challenged
Space-Saver Series
Traditional
With Side Splashes
With Standard Towel -
Dispenser and/or
Soap Dispenser

Seamless Welded-In Sinks

with Deep-Drawn Bowl
with Fabricated Straight Wall

Special Purpose

Economical
With Deck Mount Faucet
With Waste Receptacle
With 8" Centerline Faucet/Holes

SPEC-MASTER®

FFN Series Flush Front
Supermarket Meat-Platter

SPEC-MASTER®

FN Series Covered Corner

One- To Four-Compartment

Utility

Detachable Drainboards
One- To Four-Compartment



Sink and Hand Sink

Accessories

EAGLE®
GROUP
Profit from the Eagle Advantage®



STANDARD - 4" Center (except #313075)

Description	Model #
splash mounted, gooseneck (A.)	303987
wrist handles	307120
splash mounted with wrist handles, gooseneck	306495
deck mounted, gooseneck (B.)	302004
deck mounted, 8" spout (C.)	301248
drinking bubbler (D.)	318495
splash mounted, gooseneck, 8" center	313075

REPAIR KIT (E.) - for Faucets #303987, 302004, & 301248 only

Description	Model #
hot/cold ceramic cartridge	368421

REPLACEMENT T&S for Physically Challenged Hand Sinks only

EXTRA HEAVY DUTY FAUCETS

Description	Model #
splash mounted, gooseneck (F.)	306134
splash mounted, wrist handles, gooseneck (G.)	313305

SPOUTS/SPOUT ASSEMBLIES (H.)

Description	Model #
splash mounted replacement gooseneck for 120V AC electronic or pedal-operated model	312162

BATTERY-POWERED ELECTRIC-EYE

Description	Model #
splash mount, with 6-volt battery and built-in low battery indicator	326014
Upgrade: T&S splash mount, (I.) with batteries and AC adapter for dual operation	356128



Battery and AC adapter for dual operation. With AC adapter plugged in, faucet automatically switches to AC power to conserve battery.

Extra Heavy Duty
- TOP Quality

OUR BEST!

All faucets used in Eagle Sinks are lead-free.

Customer Service is available
8:00 am to 5:00 pm EST, Mon. - Fri.

The industry's
CLEAN LEADER.

Phone | **1-800-441-8440**

100 Industrial Boulevard • Clayton, Delaware 19938-8903 U.S.A.



STANDARD - 8" Center, Splash Mounted

Description	Model #
8" spout, standard	313918
12" spout, standard (A.)	300716
14" spout, standard	300804
16" spout, standard	313919
12" spout, heavy duty (B.)	301001
14" spout, heavy duty	301002
19" double-jointed spout (C.)	301003
gooseneck, 8" center (D.)	313075

- WITH WRIST HANDLES

Description	Model #
deck mounted, 4" center, (E.) standard	301005
deck mounted, 4" center, heavy duty	301004

REPAIR KITS

- FOR FAUCETS #313918 & 313919

Consists of	Model #
hot/cold stems, handles, seats, bonnet nuts, and O-rings	304146

- FOR FAUCETS #300716 & 300804

Consists of	Model #
hot/cold ceramic cartridge	368421

T&S EXTRA HEAVY DUTY - 8" Center, Splash Mounted

Description	Model #
8" spout	313920
10" spout (F.)	340380
12" spout (G.)	313293
14" spout	313294

- WITH WRIST HANDLES

Description	Model #
deck mounted, 4" center, (H.) gooseneck	313304

More accessories mean more design options for you...So you'll have more efficient work areas along with **IMPROVED HYGIENE.**



Deck mounted with 4" centers. 4" long wrist handles and rigid gooseneck spout.



Extra Heavy Duty

- TOP Quality

OUR BEST!



Splash-mounted with 8" centers. T&S quality products.



Deck mounted with 4" centers. T&S quality product.



All faucets used in Eagle Sinks are lead-free.

Visit Us @ <http://www.eaglegrp.com>



Extra Heavy Duty
- TOP Quality

OUR BEST!

PRERINSE UNITS AND COMPONENTS

STANDARD -

Description	Model #
splash mounted spray (A.)	300719
deck mounted spray (B.)	300718
faucet add-on with 12" spout (C.)	301189
wall bracket (D.)	301190
prerinse hose, 36" length (E.)	313116
prerinse spray valve (F.) assembly for spray units #300718 and 300719	313323

T&S EXTRA HEAVY DUTY -

Description	Model #
splash mount spray unit (G.) with wall bracket	313296
deck mounted spray (H.) with wall bracket	313295
faucet add-on with 12" spout (I.) for use with #313296 faucet	313297

POWERPULSE™ HIGH-EFFICIENCY -

Description	Model #
Uses 0.74gpm, pulsing action	384794
Uses 1.05gpm, pulsing action	313295

SINK COVERS for 314, 412, 414, and FN Series Sinks only

Description	Polyboard (J.)	S/S (K.)
14" x 10"	313207	321555
16" x 20"	351584	351585
20" x 18"	335377	346175
20" x 20"	326267	305428
22" x 22"	313204	321557
24" x 18"	326268	326270
24" x 24"	313205	321558
28" x 20"	326269	326271

LEG COMPONENTS

Description	Model #
19" s/s leg for utility sinks (L.)	300315
s/s flanged bullet feet (M.)	313835
s/s bullet feet (N.)	300692
plastic bullet feet	300293

Customer Service is available
8:00 am to 5:00 pm EST, Mon. - Fri.

Phone | **1-800-441-8440**

100 Industrial Boulevard • Clayton, Delaware 19938-8903 U.S.A.



SHUT-OFF (A.)

Description	Model #
shut-off push bar	349921

TEMPERATURE ADJUSTMENT ("Mixing Valve") (B.)

Description	Model #
built-in check valves to prevent backflow and adjustment screw valves to mix hot and cold	326015

FAUCET-MOUNT EMERGENCY EYE WASH UNITS

Description	Model #
pull valve activates fountain (C.)	326272
rotate to activate, "eye-pod" design	377563
-anti-scald valve (D.)	373848

ANTI-SCALD VALVE (E.)

Description	Model #
1/2 " NPT, 100-145°F	326696

IMPORTANT: Not for use with emergency eye wash unit.

NON-ADJUSTABLE Y-INLET MIXING VALVE (F.)

Description	Model #
male connection; threads are 9/16-24 UNEF	342938

PEDAL VALVES

Description	Model #
KNEE PEDAL VALVE	
double (G.)	313481
single (H.)	351738
FOOT PEDAL VALVE, FLOOR MOUNT	
double (I.)	300604
single (J.)	355994

Replacement Cartridge for all Pedal Valves: Model #374955. Consult factory for pricing.

TEMPERING VALVE (K.)


Description	Model #
thermoplastic body, 3/8" male compression fittings, 80°F-120°F, 0.5-2.5 gpm, built-in check valve	375612




A. Antibacterial surface. Screws onto faucet aerator. Polished chrome finish.



B. For hand sinks with AC-powered electric faucet or sinks with single pedal valves. Cast brass body. 3/8" all connections.




C. Fits in place of standard aerator on spout. Comes with two dust covers. Polished chrome finish.

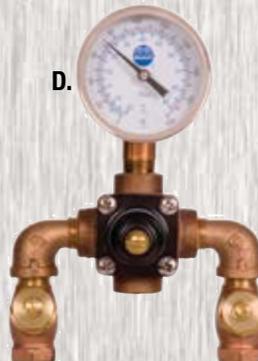

D. This is the only anti-scald valve to be used with faucet-mount emergency eye wash unit. Meets ANSI Z358.1 standard.



E. Automatic shutdown with either hot or cold water failure.



F. Standard on electronic hand sinks and hand sinks with single pedal valves only. Chrome-plated brass body.



G.




H.



I.



J.




K.

Maximum output of 120°F. Maximum pressure of 150 psi. ASSE 1016 and 1070 listed.

Visit Us @ <http://www.eaglegrp.com>



Type 300 stainless steel.



TANKLESS WATER HEATER

(J.) U.S. Patent # 5,732,422. 20 gauge stainless steel. Removable. Comes with skirt. Must be factory installed.

99% EFFICIENT!

Flow switch activates heater only on demand—no standby heat lost.

TOWEL/SOAP DISPENSERS

Description	Model #
towel dispenser with...	
- conventional soap dispenser (A.)	DP-10
- electric eye soap dispenser (B.)	DP-20
towel dispenser, wall mounted (C.)	318496
touchless towel dispenser (D.)	384796

SOAP DISPENSERS

Description	Model #
conventional, 12-oz. (E.)	300602
wall mounted with electric eye (F.)	377456
deck-mount, 16-oz. (G.)	324074

HAND SANITIZING DISPENSER (H.)

Description	Model #
Purell/TFX, wall mounted	377455

NAIL BRUSH AND HOLDER (I.)

Description	add suffix* #
infectious-control nail brush	-NB
made of FDA-approved material, splash-mount stainless steel nail brush holder	
*Example: HSA-10-F-NB	

WASTE RECEPTACLE (J.)

for Models:	add suffix* #
HSA-10; HSA-10-F; HSA-10-FA;	-T
HSA-10-FDP; HSA-10-FE; HSA-10-FDPE;	
HSA-10-FDPEE; and HSA-10-FW	
*Example: HSA-10-F-T	

HOT WATER HEATER (K.)

for Models:	add suffix* #
HSA-10; HSA-10-F; HSA-10-FA;	-WH
HSA-10-FDP; HSA-10-FE;	
HSA-10-FDPE; HSA-10-FDPEE;	
HSA-10-FA-P, and HSAD-10-F	
*Example: HSA-10-F-WH	

**Customer Service is available
8:00 am to 5:00 pm EST, Mon. - Fri.**

**The industry's
CLEAN LEADER.**

Phone | **1-800-441-8440**



100 Industrial Boulevard • Clayton, Delaware 19938-8903 U.S.A.

Profit from the Eagle Advantage®

FACTORY-INSTALLED

Description	add suffix* #
left end splash only	-LS
right end splash only	-RS
left and right end splash (A.)	-LRS

*Example: HSA-10-F-RS

FOR FIELD INSTALLATION (B.)

Description	Model #
self-adhesive side splash can be used for right and left application	HSA-SSK
same as above, but only for Physically Challenged Hand Sinks	HSAP-SSK

WALL BRACKETS

Description	Model #
side mounting, one pair (C.)	606396
same as above, but fit only Space Saver models	611869

SKIRT ASSEMBLIES

Description	Model #
HSA-10; HSA-10-F; HSA-10-FA; (D.) HSA-10-FDP; HSA-10-FE; HSA-10-FDPE; HSA-10-FDPEE; and HSA-10-FW	606215
HSAN-10-F	607560


DRAINS

Description	Model #
polymer lever drain fits (E.) 3-1/2" diameter holes <i>Max. flow rate: 11 gallons per min.; 660 gallons per hr.</i>	319931
overflow assembly for lever drain #319931	319932
1-1/2" drain assembly, (F.) fits 2" dia. hole <i>Max. flow rate: 12 gallons per min.; 720 gallons per hr.</i>	300886
mini crumb cup for 1-1/2" drain	300966
s/s basket drain assembly fits 3-1/2" dia. holes w/crumb cup <i>Max. flow rate: 18 gallons per min.; 1080 gallons per hr.</i>	300287
cast metal lever drain with overflow assembly, with 7-1/4" long lever, fits 3-1/2" dia. holes	347771



Type 304 stainless steel.

Note: Will not work with Space Saver Hand Sinks, that have faucets with wrist handles.



14 gauge type 304 stainless steel.



Pair of end splashes for field installation.



Type 304 stainless steel.



OPTIONAL MICROGARD® FOR HAND SINKS

Add suffix #: -MG

An antimicrobial agent which contains built-in protection to retard the growth of a broad range of bacteria, mold and mildew on the surface that cause stains, odors and degradation.

Visit Us @ <http://www.eaglegrp.com>



**Customer Service is available
8:00 am to 5:00 pm EST, Mon. - Fri.**

PLUMBING

- for Hand Sinks & Sinks

Description	Model #
tail piece, nickel-plated (A.)	300791
P-trap, nickel-plated (B.)	300789

90° Short Elbows for Splash-Mt Faucets (C.)

Ideal for all sinks with shallow backsplash!

Description	Model #
set of two, 1/2" NPT female x male	376740

- for Sinks ONLY

Description	Model #
anti-siphon vacuum breaker (D.)	313832
backflow preventer (E.)	313834

DRAINS

Description	Model #
lever handle drain with (F.) 1-1/2" or 2" NPS connection	300720

Max. flow rate: 27 gallons per min.; 1620 gallons per hr.

lever handle drain with 2" NPS connection	300721
--	--------

Max. flow rate: 32 gallons per min.; 1920 gallons per hr.

lever handle drain with 2" NPS connection and overflow	300722
---	--------

Max. flow rate: 32 gallons per min.; 1920 gallons per hr.

twist handle drain with (G.) 1-1/2" or 2" NPS connection	341189*
---	---------

Max. flow rate: 27 gallons per min.; 1620 gallons per hr.

twist handle drain with 2" NPS connection	336002*
--	---------

Max. flow rate: 32 gallons per min.; 1920 gallons per hr.

twist handle drain with 2" NPS connection and overflow	341190*
---	---------

Max. flow rate: 32 gallons per min.; 1920 gallons per hr.

nickel-plated brass rotary drain with 1-1/2" or 2" NPS connection	369653
--	--------

Max. flow rate: 40 gallons per min.; 2400 gallons per hr.

crumb cup strainer with (H.) 1-1/2" outlet	300287
---	--------

Max. flow rate: 18 gallons per min.; 1080 gallons per hr.

* Twist handle bracket, for use with twist handle drain, should be ordered as sink option "-TB" at time of sink order.

CONTROL BRACKET

- for Sinks

Description	Model #
3' x 5", extra heavy duty (I.)	309796