

# Flush Floor Mop Sink

## INSTALLATION INSTRUCTIONS


### CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.

**SAVE YOUR BOX AND ALL PACKING MATERIALS.**

YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

### Plumbing Rough-Ins - Left Splash

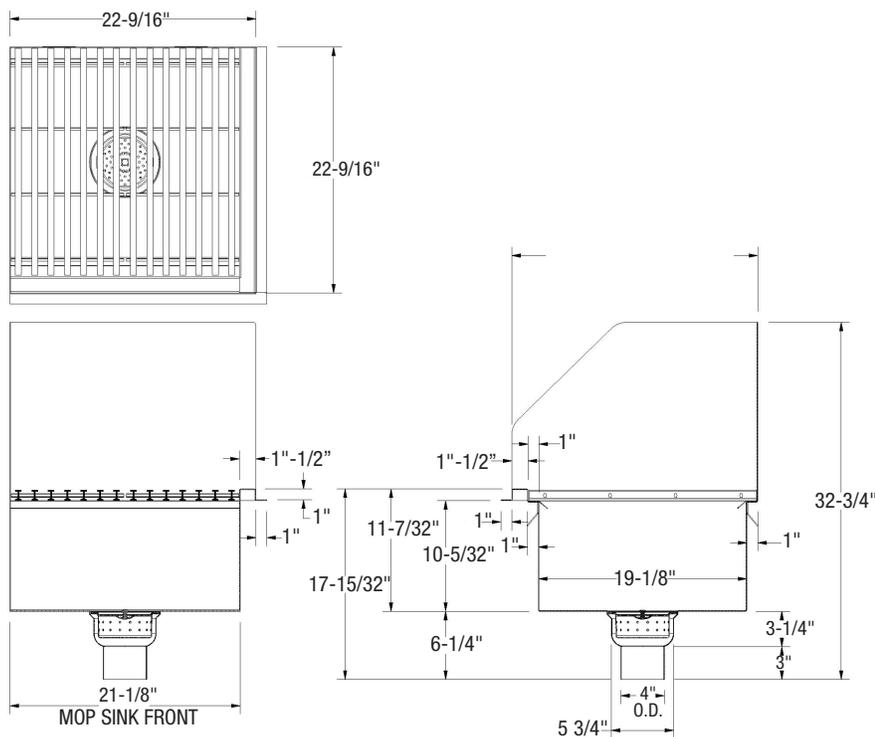

- Size of rough-in for flush floor mop sink should be as follows:

Width = "21 1/8"  
Length = "21 1/8"  
Depth = 11 1/4"


- Size of rough-in hole for drain should be 5 7/8" diameter.

Depth, to accommodate plumbing, may vary.

- Place mop sink in hole.

- Lay finished floor so that it overlaps outer flange on all four sides of trough.

- Lay grating inside mop sink accordingly.

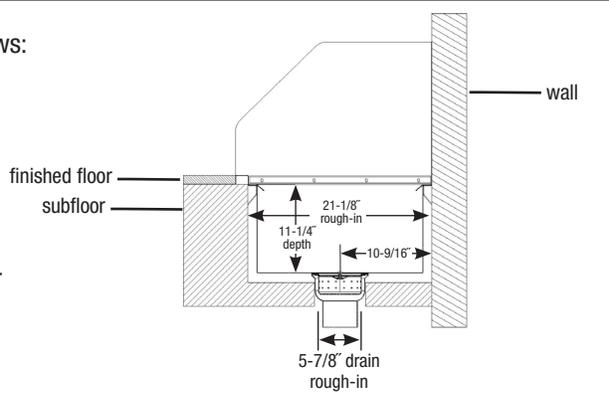

location of splash(es)	OVERALL DIMENSIONS		BOWL DIMENSIONS		BOWL CAPACITY gallons	FLOW RATE GPM	weight lbs. kg	WITH FIBERGLASS GRATING	WITH STAINLESS STEEL GRATING
	width inches	length inches	width inches	length inches				model #	model #
left side	23 5/8"	23 5/8" x 32 3/4"	600	600 x 832	17.1	20	65 29.5	FF2119-FG-LS	FF2119-SG-LS

(continued on next page)

EG10551 Revised 01/26



• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.  
• Phone: 302/653-3000 • 800/441-8440 • Fax: 302/653-2065  
• www.eaglegrp.com • www.eaglemhc.com

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2026 by the Eagle Group

# Flush Floor Mop Sink

## INSTALLATION INSTRUCTIONS


### CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.

**SAVE YOUR BOX AND ALL PACKING MATERIALS.**

YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

### Plumbing Rough-Ins - Right Splash

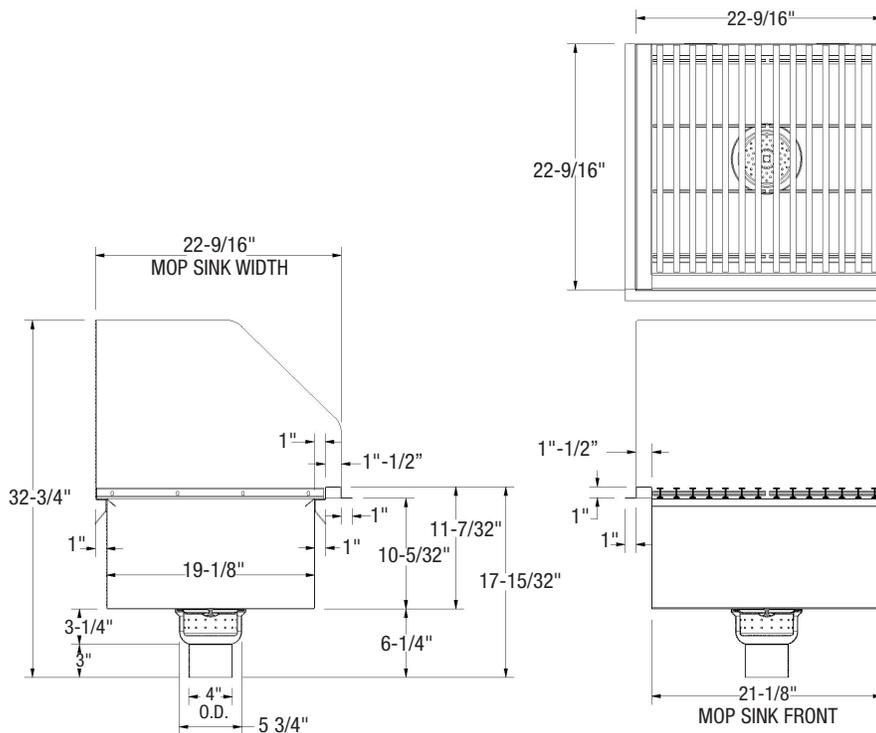


- Size of rough-in for flush floor mop sink should be as follows:

Width = "21 1/8"

Length = "21 1/8"

Depth = 11 1/4"

- Size of rough-in hole for drain should be 5 7/8" diameter. Depth, to accommodate plumbing, may vary.
- Place mop sink in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside mop sink accordingly.

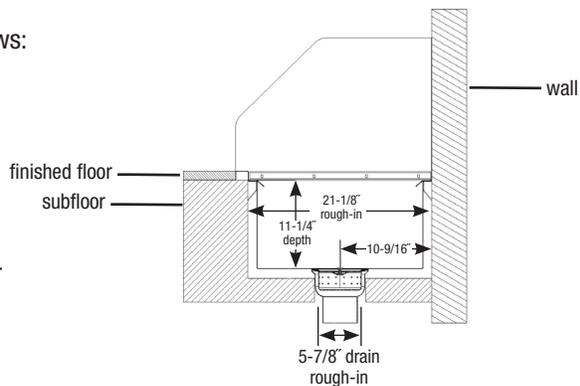

location of splash(es)	OVERALL DIMENSIONS		BOWL DIMENSIONS		BOWL CAPACITY gallons	FLOW RATE GPM	weight lbs. kg	WITH FIBERGLASS GRATING	WITH STAINLESS STEEL GRATING
	width inches	length x height mm	width inches	length x height mm				model #	model #
right side	23 <sup>5</sup> / <sub>8</sub> " x 23 <sup>5</sup> / <sub>8</sub> "	32 <sup>3</sup> / <sub>4</sub> " 600 x 600 x 832	19" x 21" x 10"	483 x 533 x 254	17.1	20	65 29.5	FF2119-FG-RS	FF2119-SG-RS

(continued on next page)


# Flush Floor Mop Sink

## INSTALLATION INSTRUCTIONS

### CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.  
**SAVE YOUR BOX AND ALL PACKING MATERIALS.**  
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.


### Plumbing Rough-Ins - Left and Right Splash

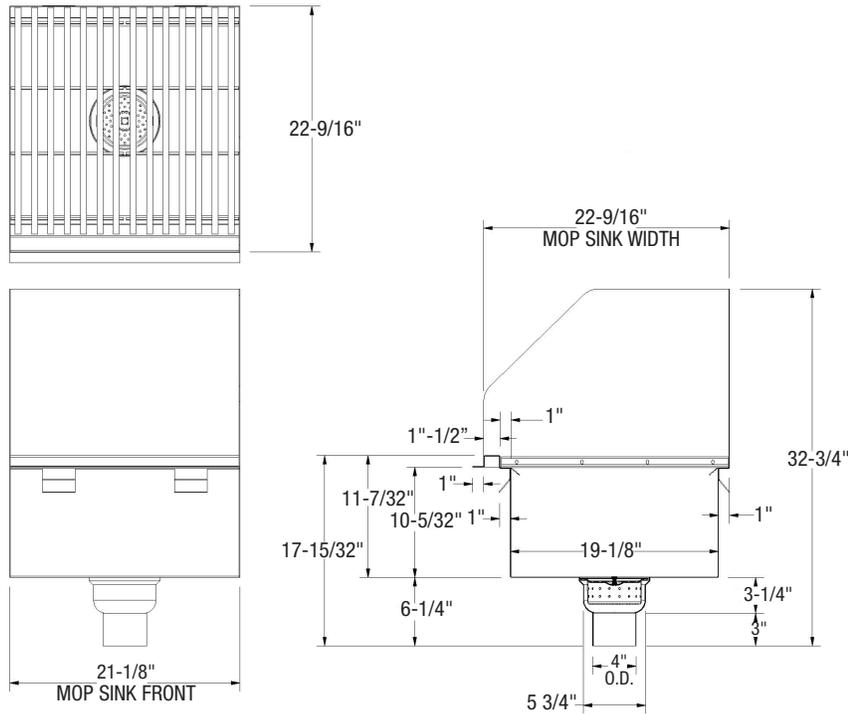

- Size of rough-in for flush floor mop sink should be as follows:

Width = "21 1/8"  
Length = "21 1/8"  
Depth = 11 1/4"

- Size of rough-in hole for drain should be 5 7/8" diameter. Depth, to accommodate plumbing, may vary.
- Place mop sink in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside mop sink accordingly.

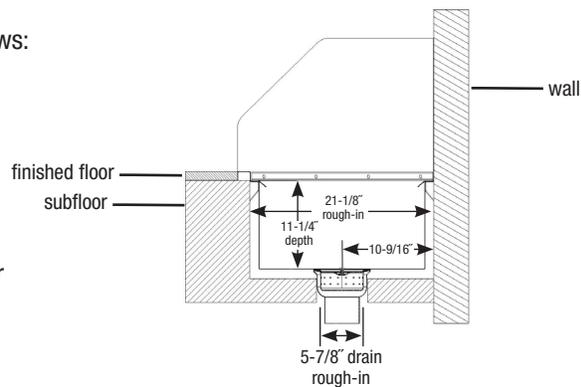

location of splash(es)	OVERALL DIMENSIONS		BOWL DIMENSIONS		BOWL CAPACITY gallons	FLOW RATE GPM	weight lbs. kg	WITH FIBERGLASS GRATING	WITH STAINLESS STEEL GRATING	
	width inches	length x height mm	width inches	length x height mm				model #	model #	
both sides	23 5/8"	21 1/8" x 32 3/4"	600 x 537 x 832	19" x 21" x 10"	483 x 533 x 254	17.1	20	65 29.5	FF2119-FG-LRS	FF2119-SG-LRS

(End)



• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.  
• Phone: 302/653-3000 • 800/441-8440 • Fax: 302/653-2065  
• www.eaglegrp.com • www.eaglemhc.com