

Profit from the Eagle Advantage®


Specification Sheet

Short Form Specifications

Eagle Griddle/Equipment Stand, model

16 gauge type 300 stainless steel top with $1\frac{1}{4}$ " upturn on rear and sides. Constructed with uni-lok® patented gusset system with the gussets recessed into the hat channels to reduce lateral movement. Heavy gauge (galvanized, stainless steel) adjustable undershelf, $1\frac{5}{6}$ "-diameter galvanized tubular legs with white metal adjustable bullet feet. Note: Units 72" and longer furnished with six legs.





Options / Accessories*

- ☐ Hardwood cutting board
- Stainless steel plate shelf
- Casters
- ☐ Stainless steel bullet feet
- * Optional Worktable Stabilizer Bars (EG10.59) do not work with Griddle/Equipment Stands.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Griddle/Equipment Stands

MODELS:

☐ T2424GS	□ T2484SGS	□ <i>T3072GS</i>	□ 307109
□ <i>T2424SGS</i>	□ <i>T2496GS</i>	☐ <i>T3072SGS</i>	□ 307110
☐ T2436GS	□ <i>T2496SGS</i>	□ <i>T3084GS</i>	\square APS2
☐ T2436SGS	☐ T3024GS	□ <i>T3084SGS</i>	□ APS3
☐ T2448GS	☐ T3024SGS	□ <i>T3096GS</i>	\square APS4
□ <i>T2448SGS</i>	□ <i>T3036GS</i>	□ <i>T3096SGS</i>	☐ APS5
□ <i>T2460GS</i>	□ T3036SGS	□ 313970	□ APS6
☐ <i>T2460SGS</i>	□ <i>T3048GS</i>	□ 307105	□ APS7
☐ T2472GS	□ <i>T3048SGS</i>	□ 307106	□ <i>APS8</i>
☐ T2472SGS	□ <i>T3060GS</i>	□ 307107	☐ CAH4-SE
TOAOACC	TOOCOCCC	□ 207100	TICAUG CE

Tabletop

- Patented uni-lok® gusset system (patent #5,165,349): gussets are recessed into hat channel, reducing lateral movement.
- Highly-polished 16 gauge type 300 stainless steel top with 1¼" (32mm) upturn on rear and both ends.

Adjustable Undershelf

 Heavy gauge galvanized or stainless steel, with gusset welded on each corner.

Legs

- · Galvanized or stainless steel.
- 1%" (41mm)-diameter.
- · Adjustable white metal feet.

Optional Hardwood Cutting Board

- Laminated, 1¼" (32mm)-thick, full length of stand, 8" (203mm)-wide.
- Complete with 1" (25mm) OD stainless steel tubular supports integrally welded to adjustable stainless steel sleeve assembly.
- Board adjustment range is 8½" (216mm) at lowest point to maximum of 11" (279mm).

Optional Plate Shelf

- Full length of stand, 8" (203mm)-wide.
- 18 gauge stainless steel.
- Adjustable height.
- Must be ordered in conjunction with cutting board.

Certifications / Approvals




EG10.27 Rev. 10/25



Item No.:	
Project No.:	
S.I.S. No.:	

Griddle/Equipment Stands

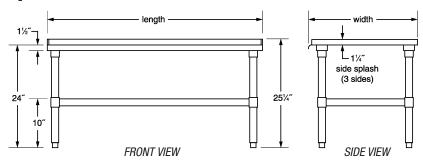


galvanized legs and	stainless legs and		tabletop	dimens	sions		veight ca		<u>es</u> ith		
undershelf model #	undershelf model #	# of legs	width in. mm	ler in.	ngth mm	1	et feet kg		casters kg	wei lbs.	ght kg
T2424GS	T2424SGS	4	243/16" 614	243/8"	619	1000	453.6	600	272.2	44	20.0
T2436GS	T2436SGS	4	243/16" 614	36¾"	924	1000	453.6	600	272.2	53	24.0
T2448GS	T2448SGS	4	243/16" 614	48%"	1229	1000	453.6	600	272.2	67	30.4
T2460GS	T2460SGS	4	243/16" 614	60%"	1534	1000	453.6	600	272.2	79	35.8
T2472GS	T2472SGS	6	243/16" 614	72¾"	1838	1500	680.4	800	362.9	82	37.2
T2484GS	T2484SGS	6	243/16" 614	84%"	2143	1500	680.4	800	362.9	132	59.9
T2496GS	T2496SGS	6	243/16" 614	96%"	2448	1500	680.4	800	362.9	157	71.2
T3024GS	T3024SGS	4	303/16" 767	24¾″	619	1000	453.6	600	272.2	54	24.5
T3036GS	T3036SGS	4	303/16" 767	36¾"	914	1000	453.6	600	272.2	65	29.5
T3048GS	T3048SGS	4	303/16" 767	48%"	1229	1000	453.6	600	272.2	77	34.9
T3060GS	T3060SGS	4	303/16" 767	60%"	1534	1000	453.6	600	272.2	87	39.5
T3072GS	T3072SGS	6	303/16" 767	723/8"	1838	1500	680.4	800	362.9	105	47.6
T3084GS	T3084SGS	6	303/16" 767	84¾"	2143	1500	680.4	800	362.9	132	59.9
T3096GS	T3096SGS	6	303/16" 767	96%"	2448	1500	680.4	800	362.9	169	76.7

Optional Hardwood Cutting Board

	width		ler	ngth	weight		
model #	in.	mm	in.	mm	lbs.	kg	
313970	8″	203	24"	610	12	5.4	
307105	8″	203	36″	914	16	7.3	
307106	8″	203	48″	1219	21	9.5	
307107	8″	203	60″	1524	26	11.8	
307108	8″	203	72″	1829	31	14.1	
307109	8″	203	84″	2134	39	17.6	
307110	8″	203	96″	2438	46	20.9	

Optional Plate Shelf

	width		lei	ngth	weight		
model #	in.	mm	in.	mm	lbs.	kg	
APS2	8″	203	24"	610	5	2.3	
APS3	8″	203	36″	914	8	3.6	
APS4	8″	203	48″	1219	11	5.0	
APS5	8″	203	60″	1524	15	6.8	
APS6	8″	203	72″	1829	19	8.6	
APS7	8″	203	84″	2134	30	13.6	
APS8	8″	203	96″	2438	35	15.9	



dimensions of unit with optional hardwood cutting board and plate shelf



Optional Zinc Swivel Casters

5" (127mm)-diameter. 200 lb. (90.7 kg) weight capacity per caster. Heavy duty. Resilient tread.

model #	description
CAH4-SB	set of 4 (2 w/brake)
CAH6-SB	set of 6 (3 w/brake)

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2025 by Eagle Group

Rev. 10/25