



Profit from the Eagle Advantage®

Phone: (800) 441-8440 • (302) 653-3000

FAX: (302) 653-2065

# Product Announcement

## Short Form Specifications

Eagle Sloped Mobile Ice Caddy, model \_\_\_\_\_.  
Top and body are heavy gauge stainless steel. Ice storage bin is type 304 stainless steel, fully insulated, isolated from exterior with thermoplastic plastic breaker strips, 19" front-to-back and 17" deep, with pan sloped to a 1" NPS drain connection with ball valve, hinged lift-off cover and 5"-diameter casters—two with brakes.

Item #:	_____
Model #:	_____
Project #:	_____
SIS #:	_____

EG8228 Rev. 03/26

### Design and Construction Features

- Stainless steel construction
- 1" (25mm) drain with ball valve
- Foamed in place insulated ice bin
- Hinged lift-off cover
- 5" (127mm) casters – two with brake
- #SLMIC1824 ice bin is 18" x 24" x 31<sup>5</sup>/<sub>16</sub>" (457 x 610 x 795mm)
- #SLMIC2424 ice bin is 24" x 24" x 31<sup>5</sup>/<sub>16</sub>" (610 x 610 x 795mm)
- #SLMIC3024 ice bin is 30" x 24" x 31<sup>5</sup>/<sub>16</sub>" (762 x 610 x 795mm)

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.

Phone: (302) 653-3000. FAX: (302) 653-2065.

E-mail: quotes@eaglegrp.com

## Sloped Mobile Ice Caddies



#SLMIC2424

### Features include...



hinged lift-off cover



1" drain with ball valve




5" swivel casters, two with brake

*Ideal for any place which serves ice cold beverages, from restaurants and bars to indoor and outdoor venues in which portability is a must, Eagle's NEW Sloped Mobile Ice Caddies will meet your needs! Stainless steel construction is durable as well as attractive. Hefty 5" casters, two with brake, allow for easy mobility. Insulated high-capacity ice bin will keep your operation stocked with ice for hours. Bottom pan slopes to a 1" NPS drain with ball valve.*



# Sloped Mobile Ice Caddies

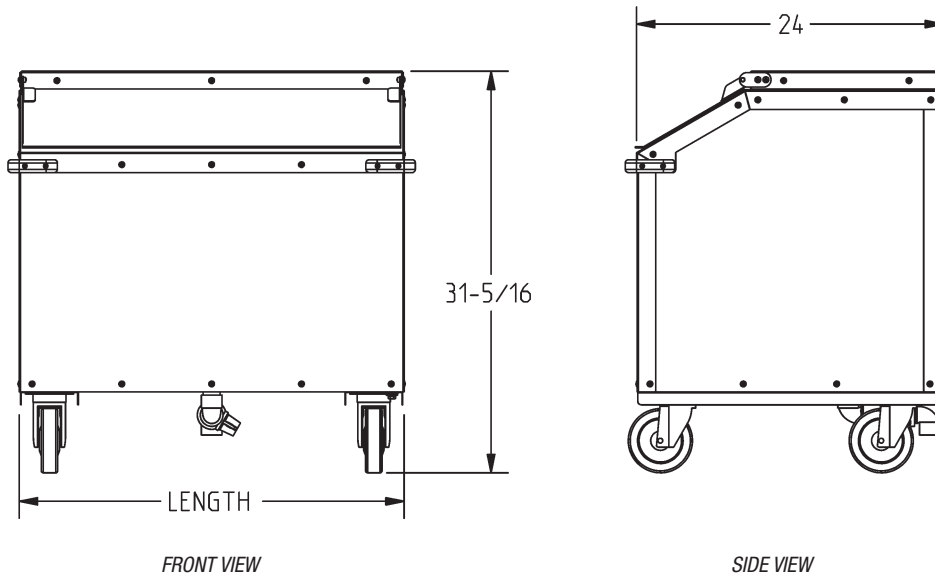

model #	width		length		weight		ice capacity	
	in.	mm	in.	mm	lbs.	kg	lbs.	kg
<b>SLMIC1824</b>	24"	610	18"	458	175	79.4	98.6	44.8
<b>SLMIC2424</b>	24"	610	24"	610	190	86.2	131.6	59.7
<b>SLMIC3024</b>	24"	610	30"	762	205	93.0	164.5	74.6