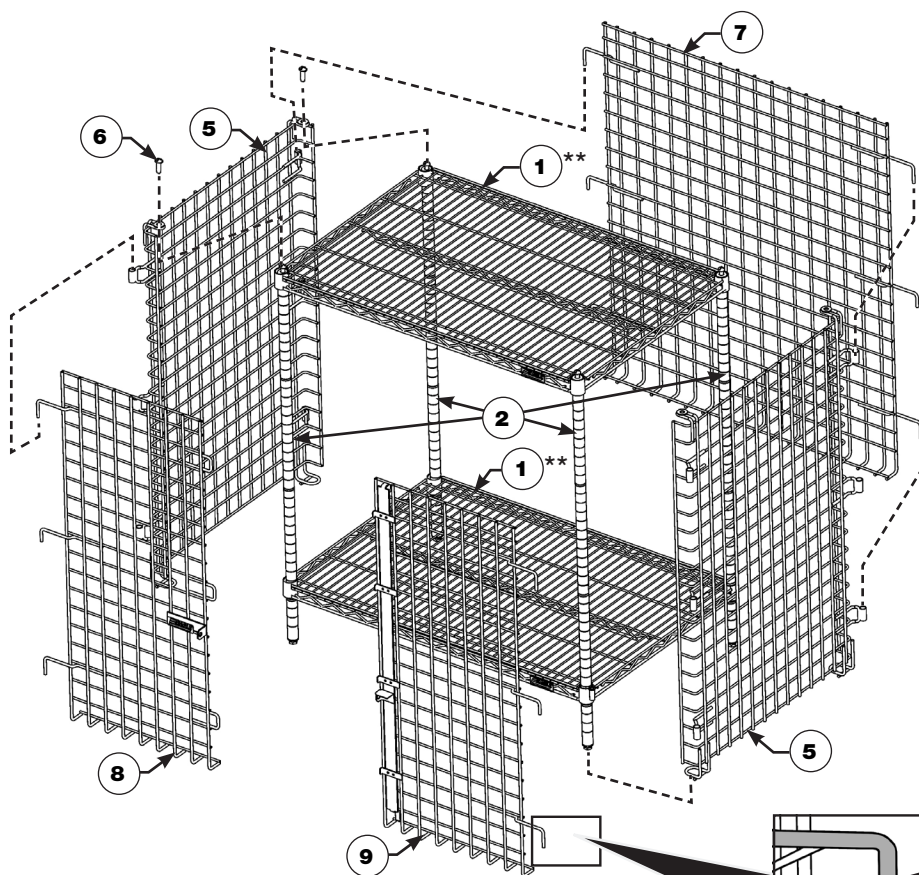# Mini Security Unit

ASSEMBLY INSTRUCTIONS

CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING
CARRIER FOR ANY DAMAGE. **SAVE YOUR BOX AND ALL PACKING MATERIALS.**
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

Thank you for your purchase. Before assembly, read this instruction sheet carefully.
After reading, be sure to store this instruction in a safe place, should it be needed for future reference.
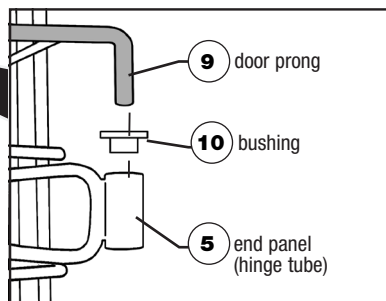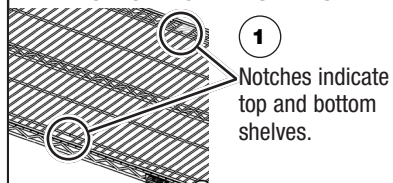

Parts List

#	qty	description
#1	2	Notched Wire Shelf **
#2	4	Posts
#3	2	(bags of four) Aluminum Split Sleeves with Retaining Rings
#4	1	Spacer Box
#5	2	End Panels
#6	4	⅜″- 16″ x 1¼″ Tamper Proof Bolts
#7	1	Back Panel
#8	1	Left Door Panel
#9	1	Right Door Panel with Latch
#10	6	Bushings
#11	*	Retaining clamps (#A221681)
#12	*	Optional Center Shelves, if ordered.

* Varies per order.

** IMPORTANT TO NOTE IF YOUR UNIT CAME WITH OPTIONAL CENTER SHELVES

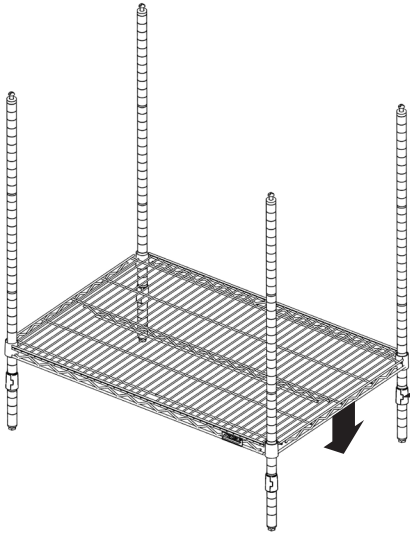Notches indicate top and bottom shelves.

door prong

bushing

end panel (hinge tube)

EG9801   Revised 01/25

EAGLE GROUP®

Profit from the Eagle Advantage®

- 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.
- Phone: 302/653-3000 • 800/441-8440 • Fax: 302/653-2065
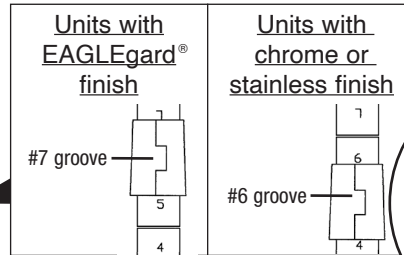- www.eaglegrp.com • www.eaglemhc.com

Mini Security Unit

Step 1: Assemble shelves and posts, starting with bottom shelf.
NOTE: Bottom shelf must be assembled to posts FIRST.

ATTACH SPLIT SLEEVES TO POSTS.
• Wider part of taper goes toward the bottom.
• Make sure rib on split sleeve is seated into groove on post.
• Set aside retaining rings until later.

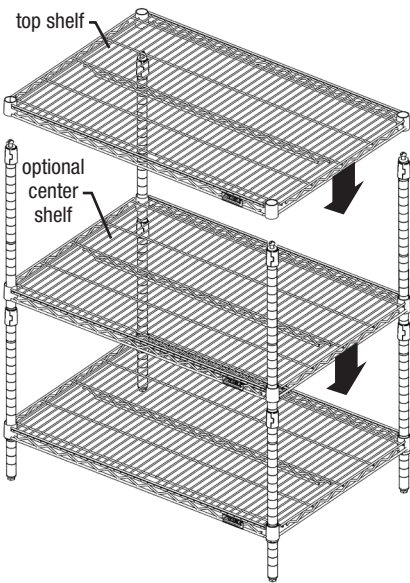| Units with EAGLEgard® finish	Units with chrome or stainless finish
#7 groove	#6 groove

split sleeves

MOUNT BOTTOM SHELF.
• Insert top of posts through bottom of shelf corner collars.
• Slide shelf down posts until split sleeves are seated inside corner collars.
DO NOT SECURE YET!

corner collar

post

split sleeve

IMPORTANT: IF YOU HAVE OPTIONAL CENTER SHELVES, THEY MUST BE INSTALLED IMMEDIATELY AFTER INSTALLING BOTTOM SHELF. REPEAT **STEP 1** TO MOUNT OPTIONAL CENTER SHELVES (IF ANY), WORKING FROM BOTTOM TO TOP.

REPEAT **STEP 1** TO MOUNT TOP SHELF.

top shelf

optional center shelf

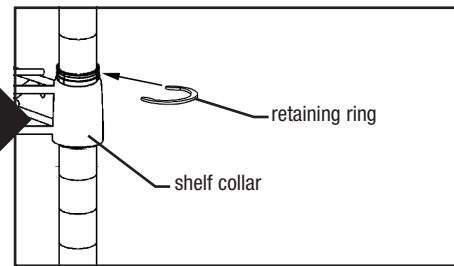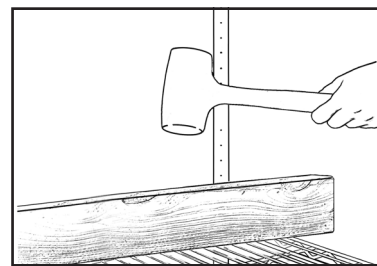## Step 2: Secure center shelves (if any) and top shelf.
DO NOT SECURE BOTTOM SHELF YET.

PLACE A BOARD ACROSS SHELF CORNER AND GENTLY TAP WITH HAMMER OR MALLET.
• Do NOT hammer directly on wire or corner.

APPLY SPLIT SLEEVE RETAINING RINGS.
• Make sure the groove, located on top of split sleeve, is accessible.
• Gently tap ring into the groove of each split sleeve.

retaining ring

shelf collar
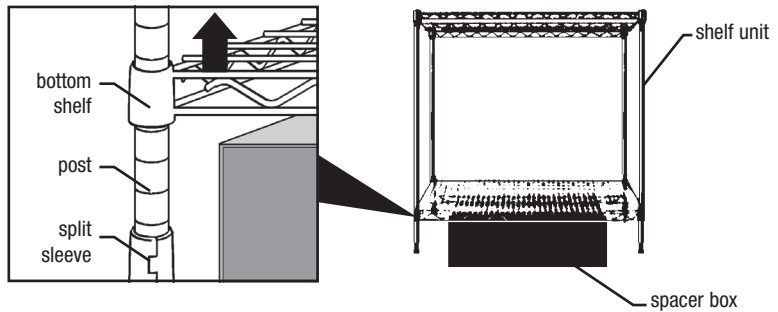
ASSEMBLY INSTRUCTIONS

Step 3: Attach end panels.
NOTE*: Additional standard shelves cannot be added once the end panels are in place.

* Add-A-Shelf® and Quad-Adjust® shelves can be added
  after assembly. Contact Eagle Group for more information.
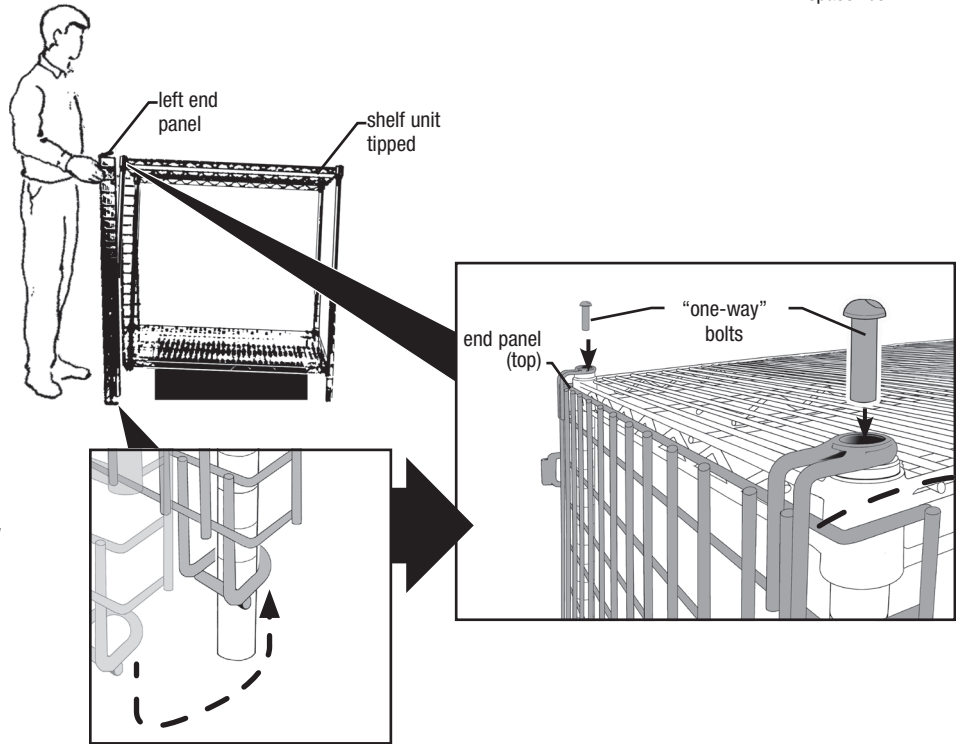
TEMPORARILY RAISE BOTTOM SHELF.

- Place assembled shelf unit over spacer box (same box the shelves were packed in).
- Lift bottom shelf off split sleeves, so shelf rests on spacer box and posts touch the floor.

bottom shelf

post

split sleeve

shelf unit

spacer box

ATTACH END PANELS TO UNIT.

- Place end panels in position. *Note: Large loops should be at the bottom, small loops at the top.*
- Tip unit slightly so bottom loops of end panel can slide under bottom of front and rear posts.
- Lift enclosure panel and position top loops over top of front and rear posts.
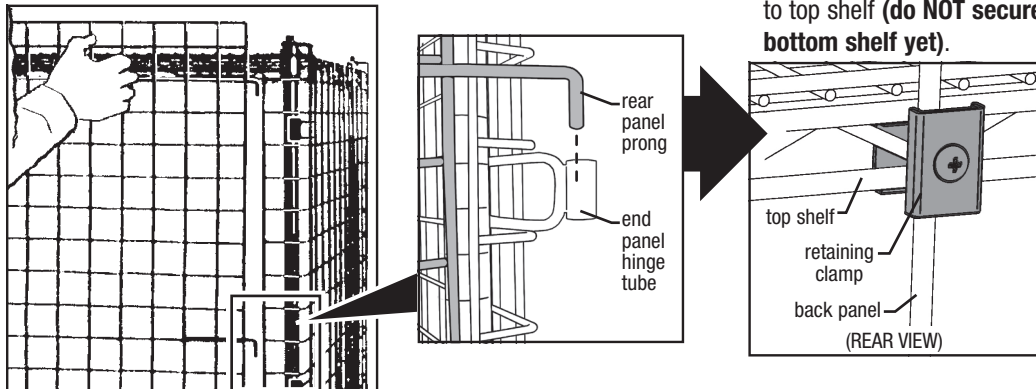- Secure end panel in place, using "one-way" bolts.
  Note: For stainless steel units, use provided tamper-resistant #14 spanner insert bit to install bolts. IMPORTANT: If using drill to assemble, USE DRILL AT LOW POWER SETTING.

left end panel

shelf unit tipped

end panel (top)

"one-way" bolts

REPEAT **STEP 3** TO ATTACH REMAINING END PANEL.

Step 4: Attach rear panel.

- Place rear panel in position. Insert rear panel prongs into end panel hinge tubes as shown below.

- For extra security, use retaining clamps to secure rear panel to top shelf **(do NOT secure bottom shelf yet)**.
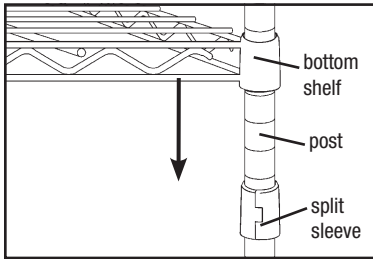
rear panel prong

end panel hinge tube

top shelf

retaining clamp

back panel

(REAR VIEW)

Mini Security Unit

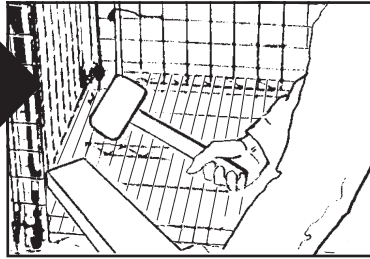## ASSEMBLY INSTRUCTIONS

Step 5: Secure bottom shelf.

• Remove spacer box and lower bottom shelf onto split sleeves.

bottom shelf
post
split sleeve

• Place a board across each corner and tap with hammer or mallet.

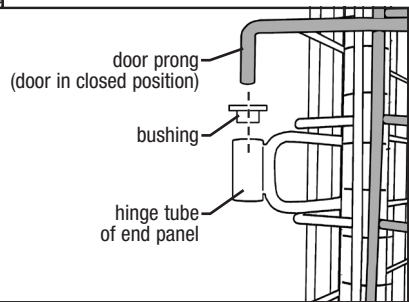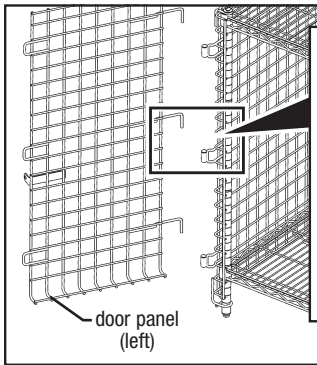• Gently tap split sleeve retaining ring into groove of each split sleeve.

retaining ring
shelf collar

• For extra security, use retaining clamps to secure rear panel to bottom shelf.

bottom shelf
retaining clamp
back panel
(REAR VIEW)

Step 6: Attach door panels.

• *Note: Insert bushings (provided) into hinge tubes of end panels BEFORE installing doors.*
• Hang left door panel and right door panel.

door prong
(door in closed position)
bushing
hinge tube of end panel
door panel (left)

TO CLOSE DOORS:

• Push left-hand door shut.

• Right-hand door features movable latch. Move latch upward, push door shut, then move latch downward. Latch hooks into top and bottom shelves, keeping both doors closed.

(End)