




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Anti-Splash Floor Trough with stainless steel grating, model _____. Unit constructed of 14/304 stainless steel all-welded construction. Patented anti-splash design (patent #D519,618 S) assures complete drainage while preventing splash back onto the floor. Drain accommodates up to a 4" diameter pipe and comes standard with a stainless steel removable perforated basket. Type 304 stainless steel subway style grating shall be $\frac{3}{16}$ " x 1" vertically positioned bars spaced 1" apart for ease of drainage. Two $\frac{5}{8}$ " stainless steel rods, set $2\frac{1}{4}$ " in from each edge, are welded to the bars to eliminate swaying.

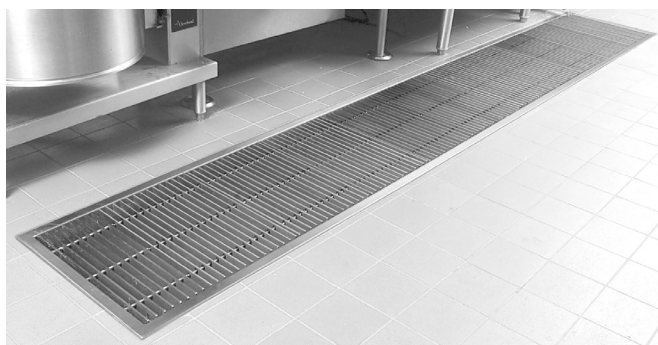

anti-splash floor trough

Options / Accessories

☐ ADA-compliant grating*

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Anti-Splash Floor Troughs with Subway-Style Stainless Steel Grating

MODELS:

☐ ASFT-1218-SG	☐ ASFT-1548-SG	☐ ASFT-1884-SG
☐ ASFT-1224-SG	☐ ASFT-1560-SG	☐ ASFT-1896-SG
☐ ASFT-1230-SG	☐ ASFT-1572-SG	☐ ASFT-18120-SG
☐ ASFT-1236-SG	☐ ASFT-1584-SG	☐ ASFT-2424-SG
☐ ASFT-1248-SG	☐ ASFT-1596-SG	☐ ASFT-2430-SG
☐ ASFT-1260-SG	☐ ASFT-15120-SG	☐ ASFT-2436-SG
☐ ASFT-1272-SG	☐ ASFT-1824-SG	☐ ASFT-2448-SG
☐ ASFT-1284-SG	☐ ASFT-1830-SG	☐ ASFT-2460-SG
☐ ASFT-1296-SG	☐ ASFT-1836-SG	☐ ASFT-2472-SG
☐ ASFT-12120-SG	☐ ASFT-1848-SG	☐ ASFT-2484-SG
☐ ASFT-1524-SG	☐ ASFT-1860-SG	☐ ASFT-2496-SG
☐ ASFT-1530-SG	☐ ASFT-1872-SG	☐ ASFT-24120-SG
☐ ASFT-1536-SG		

Design and Construction Features

- Patented "anti-splash" design (patent #D519,618 S) assures complete drainage, while preventing splash back onto floor.
- 14 gauge type 304 stainless steel all-welded construction.
- Built-in pitch towards drain ensures complete drainage.
- Stainless steel drain accommodates up to a 4" (102mm) diameter pipe, and features a removable perforated stainless steel basket.
- Comes with subway-style stainless steel grating, featuring $\frac{3}{16}$ " x 1" vertically positioned bars spaced 1" apart.
- Floor troughs with gray ADA-compliant grating* available. To order, add suffix "-ADA" to end of model number. Example: ASFT-1224-SG-ADA
- Custom sizes available. Consult factory for details.

* For Floor Troughs with Stainless Steel Grating, optional ADA-compliant Grating features additional stainless steel flat bars spaced 1/4" apart. ADA-compliant Grating is available in gray color only.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Certifications / Approvals



AutoQuotes



Spec sheets available for viewing, printing or downloading from our online literature library at our websites



Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2025 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Anti-Splash Floor Troughs with Subway-Style Stainless Steel Grating

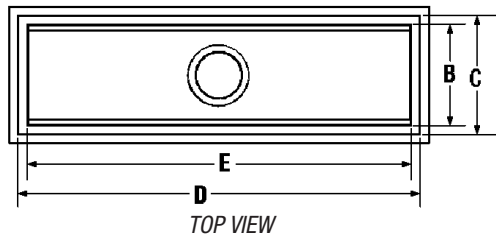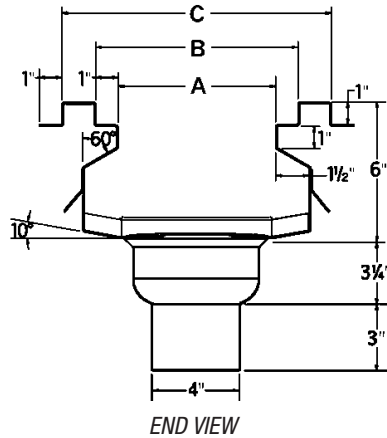

See chart below for dimensions A through E

Grating Used in Various Floor Troughs

Floor Trough (dimension D)	Floor Trough (dimension E)	Grating Used - Quantity and Length
18" (457mm)	15" (381mm)	one 15" (381mm)
24" (610mm)	21" (533mm)	one 12" (305mm) and one 9" (229mm)
30" (762mm)	27" (686mm)	three 9" (229mm)
36" (914mm)	33" (838mm)	two 12" (305mm) and one 9" (229mm)
48" (1219mm)	45" (1143mm)	three 12" (305mm) and one 9" (229mm)
60" (1524mm)	57" (1448mm)	four 12" (305mm) and one 9" (229mm)
72" (1829mm)	69" (1753mm)	five 12" (305mm) and one 9" (229mm)
84" (2134mm)	81" (2057mm)	six 12" (305mm) and one 9" (229mm)
96" (2438mm)	93" (2362mm)	seven 12" (305mm) and one 9" (229mm)
120" (3048mm)	117" (2972mm)	nine 12" (305mm) and one 9" (229mm)

12" (305mm)-WIDE TROUGHs
 dimension A: 7" (178mm)
 dimension B: 9" (229mm)
 dimension C: 12" (305mm)
 weight

lbs.	kg	model #
70	31.8	ASFT-1218-SG
89	40.4	ASFT-1224-SG
103	46.7	ASFT-1230-SG
116	52.6	ASFT-1236-SG
142	64.4	ASFT-1248-SG
168	76.2	ASFT-1260-SG
174	78.9	ASFT-1272-SG
180	81.7	ASFT-1284-SG
185	83.9	ASFT-1296-SG
231	104.8	ASFT-12120-SG

15" (381mm)-WIDE TROUGHs
 dimension A: 10" (254mm)
 dimension B: 12" (305mm)
 dimension C: 15" (381mm)
 weight

lbs.	kg	model #
n/a	n/a	n/a
97	44.0	ASFT-1524-SG
113	51.3	ASFT-1530-SG
131	59.4	ASFT-1536-SG
147	66.8	ASFT-1548-SG
189	85.7	ASFT-1560-SG
196	88.9	ASFT-1572-SG
203	92.1	ASFT-1584-SG
245	111.1	ASFT-1596-SG
266	120.7	ASFT-15120-SG

18" (457mm)-WIDE TROUGHs
 dimension A: 13" (330mm)
 dimension B: 15" (381mm)
 dimension C: 18" (457mm)
 weight

lbs.	kg	model #
n/a	n/a	n/a
105	47.6	ASFT-1824-SG
122	55.4	ASFT-1830-SG
146	66.2	ASFT-1836-SG
177	80.3	ASFT-1848-SG
209	94.8	ASFT-1860-SG
215	97.5	ASFT-1872-SG
220	99.8	ASFT-1884-SG
249	113.0	ASFT-1896-SG
301	136.5	ASFT-18120-SG

24" (610mm)-WIDE TROUGHs
 dimension A: 19" (483mm)
 dimension B: 21" (533mm)
 dimension C: 24" (610mm)
 weight

lbs.	kg	model #
n/a	n/a	n/a
113	51.3	ASFT-2424-SG
166	75.3	ASFT-2430-SG
199	90.3	ASFT-2436-SG
213	96.6	ASFT-2448-SG
227	103.0	ASFT-2460-SG
255	115.7	ASFT-2472-SG
269	122.0	ASFT-2484-SG
307	139.3	ASFT-2496-SG
384	174.2	ASFT-24120-SG

dimension D		dimension E	
in.	mm	in.	mm
18"	457	15"	381
24"	610	21"	533
30"	762	27"	686
36"	914	33"	838
48"	1219	45"	1143
60"	1524	57"	1448
72"	1829	69"	1753
84"	2134	81"	2057
96"	2438	93"	2362
120"	3048	117"	2972

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.
 ©2025 by Eagle Group

Rev. 07/25

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.